
K-VSTO PP
Plugs

Caracteristici

Presiune de lucru	on request
Temperatura de lucru	Max. +20 °C
Material	Polypropylene (PP)
Material de etanşare	NBR



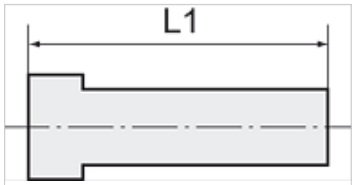

Indicaţie
Alte date sunt disponibile la cerere.

Descriere
Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Articol

Denumire	L1 (mm)	Ştuţuri (mm)
K- 07 40 29 21	102,0	32

În pofida controlului minuţios nu putem exclude eventualele informaţii eronate şi nu garantăm pentru datele cuprinse.