


# K-VSTO PP

## Plugs

### Caracteristici

Presiune de lucru	on request
Temperatura de lucru	Max. +20 °C
Material	Polypropylene (PP)
Material de etanșare	NBR

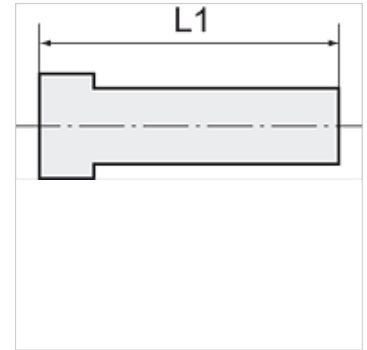

### Indicație

Alte date sunt disponibile la cerere.

### Descriere

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

### Articol

Denumire	L1 (mm)	Ștuțuri (mm)
K- 07 40 29 21	102,0	32