

K-ODER-VENTIL
OR valves

Caracteristici

Presiune de lucru	2 - 10 bar
Domeniu de temperaturi	-10 °C to +80 °C
Debit la 6,3 bari şi Δ 1 bar	500 Nl/min (G 1/8), 1300 Nl/min (G 1/4)
Corp de supapă	Aluminiu
Rulment	Stainless steel
Garnituri	NBR



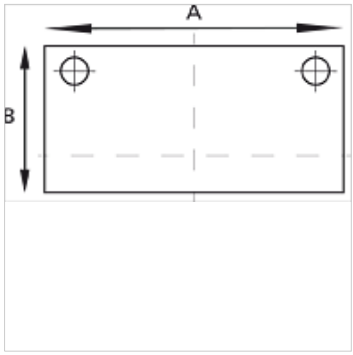

Indicaţie
Alte date sunt disponibile la cerere.

Descriere
The valve has two inlets and one outlet. A signal appears at the outlet when the left or right inlet is pressurised.
If the pressure at the two inlets is different, the stronger of the two signals appears at the outlet.

Articol

Denumire	Filet	A (mm)	B (mm)
K- 07 15 26 05	3 x G 1/8	36,0	20,0
K- 07 15 26 04	3 x G 1/4	43,0	25,0

În pofida controlului minuțios nu putem exclude eventualele informații eronate și nu garantăm pentru datele cuprinse.