


K-STECKVERSCHR 45° DRE AG-K

45° union elbows, swivel type, conical male thread, coated

HANSA FLEX

Caracteristici

| | |
|------------------------|--|
| Presiune de lucru | Max. 15 bar, coarse vacuum |
| Domeniul de utilizare | Air, vacuum |
| furtunuri recomandate | PU or PA (nylon) |
| Medii | Compressed air and all gases or liquids that are compatible with the materials |
| Domeniu de temperaturi | -20 °C to +80 °C |
| Suprafață de etanșare | Conical version: thread coating |
| Material | Plastic, Nickel plated brass |
| Inel de presiune | Plastic |

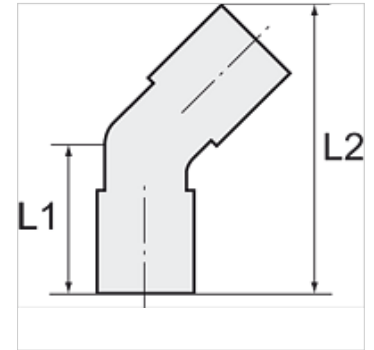

Indicație

Alte date sunt disponibile la cerere.

Descriere

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

Articol

| Denumire | Filet | pentru Ø exterior furtun | L1 (mm) | L2 (mm) | Deschiderea cheii fixe |
|----------------|-------|--------------------------|------------|------------|------------------------|
| K- 07 40 04 81 | R 1/8 | 4 mm | 22,7 | 38,5 | 10 mm |
| K- 07 40 04 82 | R 1/8 | 6 mm | 24,4 | 42,0 | 12 mm |
| K- 07 40 04 83 | R 1/8 | 8 mm | 27,6 | 48,0 | 14 mm |
| K- 07 40 04 80 | R 1/8 | 10 mm | 30,2 | 53,6 | 17 mm |
| K- 07 40 04 77 | R 1/4 | 4 mm | 25,7 | 41,5 | 14 mm |
| K- 07 40 04 78 | R 1/4 | 6 mm | 26,9 | 44,5 | 14 mm |
| K- 07 40 04 79 | R 1/4 | 8 mm | 29,6 | 50,0 | 14 mm |
| K- 07 40 04 75 | R 1/4 | 10 mm | 32,2 | 55,6 | 17 mm |
| K- 07 40 04 76 | R 1/4 | 12 mm | 35,2 | 61,9 | 21 mm |
| K- 07 40 04 86 | R 3/8 | 6 mm | 28,4 | 46,0 | 17 mm |
| K- 07 40 04 87 | R 3/8 | 8 mm | 31,1 | 51,5 | 17 mm |
| K- 07 40 04 84 | R 3/8 | 10 mm | 33,2 | 56,6 | 17 mm |
| K- 07 40 04 85 | R 3/8 | 12 mm | 36,2 | 62,9 | 21 mm |
| K- 07 40 04 73 | R 1/2 | 6 mm | 31,9 | 49,5 | 21 mm |
| K- 07 40 04 74 | R 1/2 | 8 mm | 34,6 | 55,0 | 21 mm |
| K- 07 40 04 71 | R 1/2 | 10 mm | 36,7 | 60,1 | 21 mm |
| K- 07 40 04 72 | R 1/2 | 12 mm | 39,2 | 65,9 | 21 mm |