


K-XVM ZYL OR PP

Male connectors, parallel male thread with O-ring

HANSA FLEX

Caracteristici

Presiune de lucru	on request
Temperatura de lucru	Max. +20 °C
Material	Polypropylene (PP)
Material de etanșare	NBR

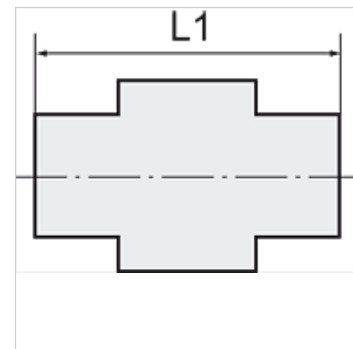

Indicație

Alte date sunt disponibile la cerere.

Descriere

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Articol

Denumire	Filet	pentru Ø exterior furtun	L1 (mm)	Deschiderea cheii fixe
K- 07 40 28 39	G 1	32 mm	111,4	46 mm
K- 07 40 28 40	G 1 1/2	32 mm	109,2	49 mm