


K-L-STECKVER DREH AG OR

Male elbows, swivel type, parallel male thread with O-ring

HANSA FLEX

Caracteristici

| | |
|----------------------|------------------|
| Presiune de lucru | Max. 16 bar |
| Temperatura de lucru | -20 °C to +80 °C |
| Material | Alamă nichelată |
| Inel de presiune | Hostaform |
| Inel O | NBR |
| Inel de prindere | Stainless steel |

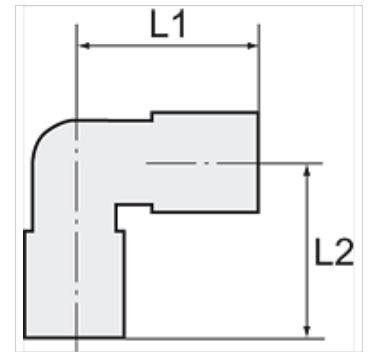

Indicație

Alte date sunt disponibile la cerere.

Descriere

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

Articol

| Denumire | Filet | pentru Ø exterior furtun | L1 (mm) | L2 (mm) | Deschiderea cheii fixe |
|----------------|-------|--------------------------|------------|------------|------------------------|
| K- 07 40 25 68 | M 5 | 4 mm | 18,6 | 15,3 | 9 mm |
| K- 07 40 25 69 | M 5 | 5 mm | 22,8 | 15,3 | 9 mm |
| K- 07 40 25 70 | M 5 | 6 mm | 21,9 | 15,3 | 9 mm |
| K- 07 40 25 79 | G 1/8 | 4 mm | 18,6 | 19,1 | 12 mm |
| K- 07 40 25 80 | G 1/8 | 5 mm | 22,8 | 19,1 | 12 mm |
| K- 07 40 25 81 | G 1/8 | 6 mm | 21,9 | 19,1 | 12 mm |
| K- 07 40 25 82 | G 1/8 | 8 mm | 25,4 | 19,1 | 12 mm |
| K- 07 40 25 75 | G 1/4 | 4 mm | 18,6 | 21,1 | 14 mm |
| K- 07 40 25 76 | G 1/4 | 5 mm | 22,8 | 21,8 | 14 mm |
| K- 07 40 25 77 | G 1/4 | 6 mm | 21,9 | 21,1 | 14 mm |
| K- 07 40 25 78 | G 1/4 | 8 mm | 25,4 | 21,1 | 14 mm |
| K- 07 40 25 74 | G 1/4 | 10 mm | 27,2 | 24,8 | 14 mm |
| K- 07 40 47 20 | G 1/4 | 12 mm | 30,0 | 25,6 | 14 mm |
| K- 07 40 25 85 | G 3/8 | 8 mm | 23,6 | 27,1 | 17 mm |
| K- 07 40 25 83 | G 3/8 | 10 mm | 27,2 | 27,1 | 17 mm |
| K- 07 40 25 84 | G 3/8 | 12 mm | 30,0 | 27,1 | 17 mm |
| K- 07 40 25 71 | G 1/2 | 10 mm | 27,2 | 30,7 | 22 mm |
| K- 07 40 25 72 | G 1/2 | 12 mm | 30,0 | 30,7 | 22 mm |
| K- 07 40 25 73 | G 1/2 | 14 mm | 33,0 | 32,3 | 22 mm |