
# K-T-STECK VB 1

Union tees

## Caracteristici

| | |
|---|---|
| **Presiune de lucru** | Max. 16 bar |
| **Temperatura de lucru** | -20 °C to +150 °C |
| **Material** | Alamă nichelată |
| **Inel de presiune** | Nickel-plated brass |
| **Inel de prindere** | Stainless steel |



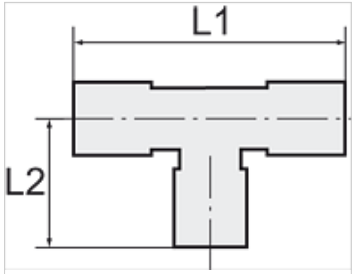


## Indicaţie

Alte date sunt disponibile la cerere.

## Descriere

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring.<br>All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

## Articol

| Denumire | pentru Ø exterior furtun | L1 (mm) | L2 (mm) |
|---|---|---|---|
| **K- 07 40 27 57** | 4 mm | 34,0 | 17,0 |
| **K- 07 40 27 58** | 6 mm | 39,0 | 19,5 |
| **K- 07 40 27 59** | 8 mm | 46,0 | 23,0 |
| **K- 07 40 27 60** | 10 mm | 50,0 | 25,0 |
| **K- 07 40 47 81** | 12 mm | 54,0 | 27,0 |
| **K- 07 40 47 82** | 14 mm | 62,0 | 31,0 |

*În pofida controlului minuțios nu putem exclude eventualele informații eronate și nu garantăm pentru datele cuprinse.*