

K-STECKVERSCHR AGR OR SK

Male connectors, parallel male thread with O-ring and outer hex

Caracteristici

Presiune de lucru	Max. 15 bar, coarse vacuum
Domeniul de utilizare	Air, vacuum
furtunuri recomandate	PU or PA (nylon)
Medii	Compressed air and all gases or liquids that are compatible with the materials
Domeniu de temperaturi	-20 °C to +80 °C
Suprafață de etanșare	Parallel version: O-ring in housing
Material	Plastic, Nickel plated brass
Inel de presiune	Plastic



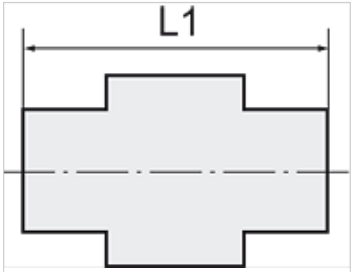

Indicație

Alte date sunt disponibile la cerere.

Descriere

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

Articol

Denumire	Filet	pentru Ø exterior furtun	Locaș hexagonal (mm)	L1 (mm)	Deschiderea cheii fixe
K- 07 40 00 78	M 5	4 mm	2,0	20,8	10 mm
K- 07 40 00 79	M 5	6 mm	2,0	22,2	12 mm
K- 07 40 00 92	G 1/8	4 mm	3,0	19,3	10 mm
K- 07 40 00 93	G 1/8	6 mm	4,0	20,2	12 mm
K- 07 40 00 94	G 1/8	8 mm	5,0	27,1	14 mm
K- 07 40 00 90	G 1/8	10 mm	5,0	28,9	17 mm
K- 07 40 00 91	G 1/8	12 mm	5,0	31,6	21 mm
K- 07 40 00 87	G 1/4	4 mm	3,0	17,4	10 mm
K- 07 40 00 88	G 1/4	6 mm	4,0	20,9	12 mm
K- 07 40 00 89	G 1/4	8 mm	6,0	23,0	14 mm
K- 07 40 00 85	G 1/4	10 mm	6,0	29,9	17 mm
K- 07 40 00 86	G 1/4	12 mm	6,0	32,6	21 mm
K- 07 40 00 98	G 3/8	6 mm	4,0	19,5	12 mm
K- 07 40 00 99	G 3/8	8 mm	6,0	22,1	14 mm
K- 07 40 00 95	G 3/8	10 mm	8,0	25,9	17 mm
K- 07 40 00 96	G 3/8	12 mm	8,0	28,6	21 mm
K- 07 40 00 97	G 3/8	16 mm	8,0	36,1	24 mm
K- 07 40 00 83	G 1/2	6 mm	4,0	22,6	12 mm
K- 07 40 00 84	G 1/2	8 mm	6,0	23,2	14 mm
K- 07 40 00 80	G 1/2	10 mm	8,0	24,5	17 mm
K- 07 40 00 81	G 1/2	12 mm	8,0	31,1	21 mm
K- 07 40 00 82	G 1/2	16 mm	10,0	38,1	24 mm

În pofida controlului minuțios nu putem exclude eventualele informații eronate și nu garantăm pentru datele cuprinse.