


K-L-STECK VB 10BAR

Union elbows (pressure max. 10 bar)

HANSA FLEX

Caracteristici

| | |
|------------------------|--|
| Presiune de lucru | Max. 10 bar |
| Domeniul de utilizare | Air, vacuum |
| furtunuri recomandate | PU or PA (nylon) |
| Medii | Compressed air and all gases or liquids that are compatible with the materials |
| Domeniu de temperaturi | -20 °C to +80 °C |
| Material | Plastic, Nickel plated brass |
| Inel de presiune | Plastic |

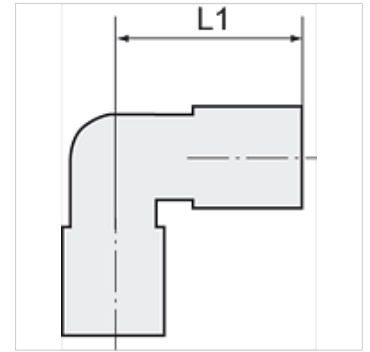

Indicație

Alte date sunt disponibile la cerere.

Descriere

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

Articol

| Denumire | pentru Ø exterior furtun | L1 (mm) |
|----------------|--------------------------|------------|
| K- 07 40 03 50 | 4 mm | 17,5 |
| K- 07 40 03 51 | 6 mm | 18,7 |
| K- 07 40 03 52 | 8 mm | 22,4 |
| K- 07 40 03 53 | 10 mm | 27,2 |
| K- 07 40 03 54 | 12 mm | 28,9 |
| K- 07 40 41 38 | 14 mm | 29,8 |
| K- 07 40 03 55 | 16 mm | 30,8 |