
K-L-STECK VB

Union elbows

Caracteristici

Presiune de lucru	Max. 16 bar
Temperatura de lucru	-20 °C to +150 °C
Material	Alamă nichelată
Inel de presiune	Nickel-plated brass
Inel de prindere	Stainless steel



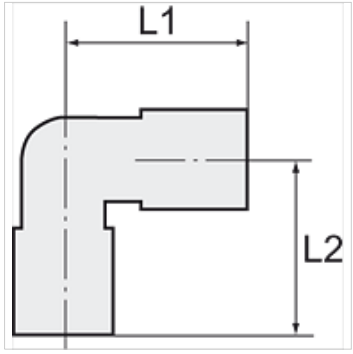

Indicaţie

Alte date sunt disponibile la cerere.

Descriere

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring.
All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

Articol

Denumire	pentru Ø exterior furtun	L1 (mm)	L2 (mm)
K- 07 40 27 53	4 mm	17,5	17,5
K- 07 40 27 54	6 mm	20,0	20,0
K- 07 40 27 55	8 mm	23,0	23,0
K- 07 40 27 56	10 mm	25,0	25,0
K- 07 40 47 79	12 mm	27,5	27,5
K- 07 40 47 80	14 mm	31,0	31,0

În pofida controlului minuțios nu putem exclude eventualele informații eronate și nu garantăm pentru datele cuprinse.