

# K-SCHOTT-STECKVERB 2

Female bulkhead connectors

## Caracteristici

| | |
|---|---|
| **Presiune de lucru** | Max. 16 bar |
| **Temperatura de lucru** | -20 °C to +150 °C |
| **Material** | Alamă nichelată |
| **Inel de presiune** | Nickel-plated brass |
| **Inel de prindere** | Stainless steel |



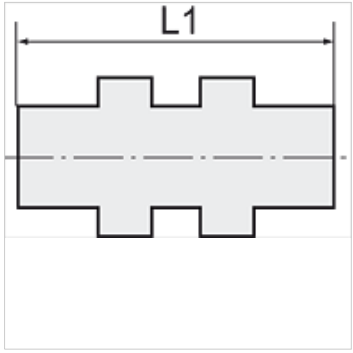


## Indicaţie

Alte date sunt disponibile la cerere.

## Descriere

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring.<br>All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

## Articol

| Denumire | Filet | pentru Ø exterior furtun | L1 (mm) | Deschiderea cheii fixe |
|---|---|---|---|---|
| **K- 07 40 27 61** | M 10 x 1 | 4 mm | 31,5 | 13 mm |
| **K- 07 40 27 62** | M 14 x 1 | 6 mm | 33,5 | 17 mm |
| **K- 07 40 27 63** | M 16 x 1 | 8 mm | 37,0 | 18 mm |
| **K- 07 40 27 64** | M 17 x 1 | 10 mm | 39,5 | 20 mm |
| **K- 07 40 47 83** | M 20 x 1 | 12 mm | 42,0 | 24 mm |
| **K- 07 40 47 84** | M 22 x 1 | 14 mm | 46,0 | 25 mm |

*În pofida controlului minuțios nu putem exclude eventualele informații eronate și nu garantăm pentru datele cuprinse.*