


K-L-STECK VERS DER AG OR 2

Male branch tees, angled plug connections, swivel type, parallel male thread with O-ring

HANSA FLEX

Caracteristici

Presiune de lucru	Max. 16 bar
Temperatura de lucru	-20 °C to +150 °C
Material	Alamă nichelată
Inel de presiune	Nickel-plated brass
Inel O	FKM (FPM)
Inel de prindere	Stainless steel

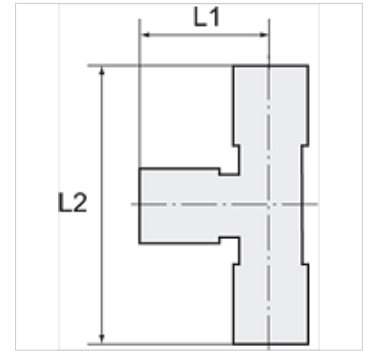

Indicație

Alte date sunt disponibile la cerere.

Descriere

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring. All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

Articol

Denumire	Filet	pentru Ø exterior furtun	L1 (mm)	L2 (mm)	Deschiderea cheii fixe
K- 07 40 27 88	G 1/8	4 mm	17,5	35,5	13 mm
K- 07 40 27 89	G 1/8	6 mm	21,0	41,5	13 mm
K- 07 40 27 90	G 1/8	8 mm	23,0	43,0	13 mm
K- 07 40 27 86	G 1/4	6 mm	21,0	45,5	13 mm
K- 07 40 27 87	G 1/4	8 mm	23,0	47,5	13 mm
K- 07 40 27 85	G 1/4	10 mm	27,0	50,5	16 mm
K- 07 40 47 92	G 3/8	8 mm	23,0	48,5	13 mm
K- 07 40 27 91	G 3/8	10 mm	27,0	54,0	16 mm
K- 07 40 47 91	G 3/8	12 mm	31,0	57,5	18 mm
K- 07 40 47 90	G 1/2	12 mm	32,0	65,5	20 mm