


K-L-STECKVER SK AGR OR

Banjo elbows with outer hex, parallel male thread with O-ring

HANSA FLEX

Caracteristici

| | |
|----------------------|---------------------|
| Presiune de lucru | Max. 16 bar |
| Temperatura de lucru | -20 °C to +150 °C |
| Material | Alamă nichelată |
| Inel de presiune | Nickel-plated brass |
| Inel O | FKM (FPM) |
| Inel de prindere | Stainless steel |

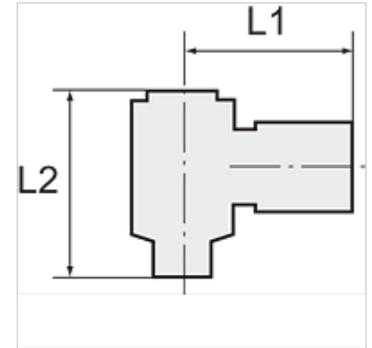

Indicație

Alte date sunt disponibile la cerere.

Descriere

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring. All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

Articol

| Denumire | Filet | pentru Ø exterior furtun | L1 (mm) | L2 (mm) | Deschiderea cheii fixe |
|----------------|-------|--------------------------|------------|------------|------------------------|
| K- 07 40 27 92 | M 5 | 4 mm | 18,0 | 17,5 | 8 mm |
| K- 07 40 27 93 | M 5 | 5 mm | 19,0 | 17,5 | 8 mm |
| K- 07 40 27 94 | M 5 | 6 mm | 19,5 | 19,5 | 8 mm |
| K- 07 40 27 98 | G 1/8 | 4 mm | 20,5 | 28,0 | 14 mm |
| K- 07 40 27 99 | G 1/8 | 6 mm | 23,0 | 28,0 | 14 mm |
| K- 07 40 28 00 | G 1/8 | 8 mm | 24,5 | 28,0 | 14 mm |
| K- 07 40 27 96 | G 1/4 | 6 mm | 24,0 | 33,0 | 17 mm |
| K- 07 40 27 97 | G 1/4 | 8 mm | 26,0 | 33,0 | 17 mm |
| K- 07 40 27 95 | G 1/4 | 10 mm | 27,0 | 33,0 | 17 mm |
| K- 07 40 28 02 | G 3/8 | 8 mm | 27,0 | 36,0 | 19 mm |
| K- 07 40 47 94 | G 3/8 | 10 mm | 28,0 | 36,0 | 19 mm |
| K- 07 40 28 01 | G 3/8 | 12 mm | 29,0 | 36,0 | 19 mm |
| K- 07 40 47 93 | G 1/2 | 12 mm | 34,5 | 42,0 | 24 mm |