
K-T-STECK VERS ASK DREH AG OR

Male branch tees with outer hex, swivel type, parallel male thread with O-ring

Caracteristici

Presiune de lucru	Max. 16 bar
Temperatura de lucru	-20 °C to +150 °C
Material	Alamă nichelată
Inel de presiune	Nickel-plated brass
Inel O	FKM (FPM)
Inel de prindere	Stainless steel



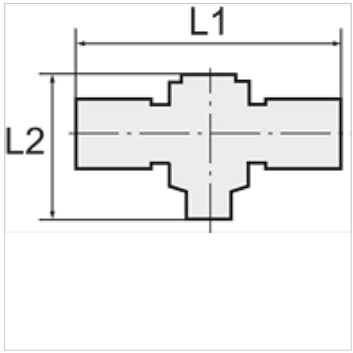

Indicaţie

Alte date sunt disponibile la cerere.

Descriere

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring.
All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

Articol

Denumire	Filet	pentru Ø exterior furtun	L1 (mm)	L2 (mm)	Deschiderea cheii fixe
K- 07 40 28 04	G 1/8	4 mm	42,0	28,0	14 mm
K- 07 40 28 05	G 1/8	6 mm	46,0	28,0	14 mm
K- 07 40 28 03	G 1/4	6 mm	48,0	33,0	17 mm

În pofida controlului minuțios nu putem exclude eventualele informații eronate și nu garantăm pentru datele cuprinse.