
K-DRG PNEU FERNGEST MULTIFIX

Pressure regulators with pneumatic remote control

Caracteristici

Presiune de intrare	Max. 16 bar
Presiune de ieşire	corresponds to the set pressure of the pilot pressure regulator
Temperatură mediu	max. 60 °C
Temperatură ambientală	Max. 60 °C
Material de etanşare	NBR
Carcasă	Die-cast zinc, Aluminium for G 1 variant
Măsurarea valorii debitului	At P1 = 8 bar, P2 = 6 bar and pressure drop Δp = 1 bar
Racord de aer de control	G 1/8



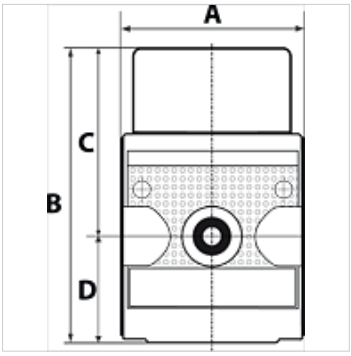

Indicaţie

Alte date sunt disponibile la cerere.

Descriere

Diaphragm pressure regulator, self-relieving, with pneumatic remote control. The pressure is set with a pilot pressure regulator (1:1 ratio). Either a standard or a precision pressure regulator can be used to regulate the pilot pressure.

Articol

Denumire	Filet	Debit (L/min)	A (mm)	B	C (mm)	D (mm)
K- 07 25 19 56	G 1/4	1800	48,0	75,0 mm	48,0	27,0
K- 07 25 19 57	G 1/2	4800	69,0	94,0 mm	59,0	35,0
K- 07 25 19 58	G 1	12500	100,0	112,0 mm	60,0	52,0

Piese de schimb

K-HALTERBAUSATZ MULTIFIX	Holder
K-KOPPELPAKET MEHR	Coupling packet
K-VERSCHLEI-SATZ MULTIFIX	Set of wearing parts »multifix«

În pofida controlului minuțios nu putem exclude eventualele informații eronate și nu garantăm pentru datele cuprinse.