


K-DRG PNEU FERNGEST MULTIFIX

Pressure regulators with pneumatic remote control

HANSA FLEX

Caracteristici

| | |
|-----------------------------|---|
| Presiune de intrare | Max. 16 bar |
| Presiune de ieșire | corresponds to the set pressure of the pilot pressure regulator |
| Temperatură mediu | max. 60 °C |
| Temperatură ambientală | Max. 60 °C |
| Material de etanșare | NBR |
| Carcasă | Die-cast zinc, Aluminium for G 1 variant |
| Măsurarea valorii debitului | At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |
| Racord de aer de control | G 1/8 |

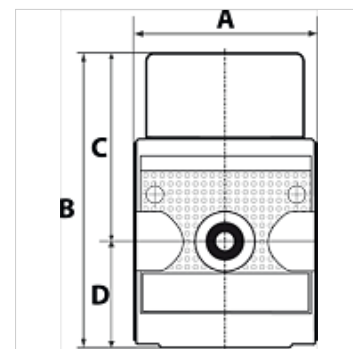

Indicație

Alte date sunt disponibile la cerere.

Descriere

Diaphragm pressure regulator, self-relieving, with pneumatic remote control. The pressure is set with a pilot pressure regulator (1:1 ratio). Either a standard or a precision pressure regulator can be used to regulate the pilot pressure.

Articol

| Denumire | Filet | Debit (L/min) | A (mm) | B | C (mm) | D (mm) |
|----------------|-------|---------------|--------|----------|--------|--------|
| K- 07 25 19 56 | G 1/4 | 1800 | 48,0 | 75,0 mm | 48,0 | 27,0 |
| K- 07 25 19 57 | G 1/2 | 4800 | 69,0 | 94,0 mm | 59,0 | 35,0 |
| K- 07 25 19 58 | G 1 | 12500 | 100,0 | 112,0 mm | 60,0 | 52,0 |

Piese de schimb

| | |
|---------------------------|---------------------------------|
| K-HALTERBAUSATZ MULTIFIX | Holder |
| K-KOPPELPAKET MEHR | Coupling packet |
| K-VERSCHLEI-SATZ MULTIFIX | Set of wearing parts »multifix« |