



# K-DRV SCHLITZSCHR DREH BESCH

Unidirectional flow control valves with outgoing air restriction, adjustable, angled, swivel type, parallel male thread with O-ring

**HANSA FLEX**

## Caracteristici

|                        |  |
|------------------------|--|
| Presiune de lucru      | Max. 10 bar  |
| Domeniul de utilizare  | Air, vacuum  |
| furtunuri recomandate  | PU or PA (nylon)   |
| Medii                  | Compressed air and all gases or liquids that are compatible with the materials |
| Domeniu de temperaturi | -20 °C to +80 °C   |
| Suprafață de etanșare  | Parallel version: O-ring in housing, Conical version: thread coating           |
| Material               | Plastic, Nickel plated brass   |
| Inel de presiune       | Plastic  |

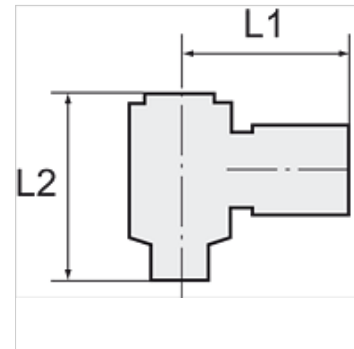

## Indicație

Alte date sunt disponibile la cerere.

## Descriere

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

## Articol

| Denumire       | Filet | pentru Ø exterior furtun | L1 (mm) | L2 min (mm) | Deschiderea cheii fixe |
|----------------|-------|--------------------------|---------|-------------|------------------------|
| K- 07 40 46 33 | M 5   | 4 mm                     | 20,0    | 23,0        | 8 mm                   |
| K- 07 40 46 34 | M 5   | 6 mm                     | 21,5    | 23,0        | 8 mm                   |
| K- 07 40 46 42 | G 1/8 | 4 mm                     | 23,0    | 31,5        | 12 mm                  |
| K- 07 40 46 43 | G 1/8 | 6 mm                     | 23,0    | 31,5        | 12 mm                  |
| K- 07 40 46 44 | G 1/8 | 8 mm                     | 26,5    | 31,5        | 12 mm                  |
| K- 07 40 46 39 | G 1/4 | 4 mm                     | 25,0    | 38,3        | 14 mm                  |
| K- 07 40 46 40 | G 1/4 | 6 mm                     | 25,0    | 38,3        | 14 mm                  |
| K- 07 40 46 41 | G 1/4 | 8 mm                     | 29,0    | 38,3        | 14 mm                  |
| K- 07 40 46 38 | G 1/4 | 10 mm                    | 31,0    | 38,3        | 14 mm                  |
| K- 07 40 46 47 | G 3/8 | 6 mm                     | 27,0    | 43,0        | 19 mm                  |
| K- 07 40 46 48 | G 3/8 | 8 mm                     | 30,5    | 43,0        | 19 mm                  |
| K- 07 40 46 45 | G 3/8 | 10 mm                    | 32,0    | 43,0        | 19 mm                  |
| K- 07 40 46 46 | G 3/8 | 12 mm                    | 35,0    | 43,0        | 19 mm                  |
| K- 07 40 46 37 | G 1/2 | 8 mm                     | 33,0    | 49,0        | 24 mm                  |
| K- 07 40 46 35 | G 1/2 | 10 mm                    | 34,5    | 49,0        | 24 mm                  |
| K- 07 40 46 36 | G 1/2 | 12 mm                    | 36,5    | 49,0        | 24 mm                  |