
K-STECKVERBINDU RED 1

Reducers

Caracteristici

Presiune de lucru	Max. 16 bar
Temperatura de lucru	-20 °C to +80 °C
Material	Alamă nichelată
Inel de presiune	Hostaform
Inel de prindere	Stainless steel



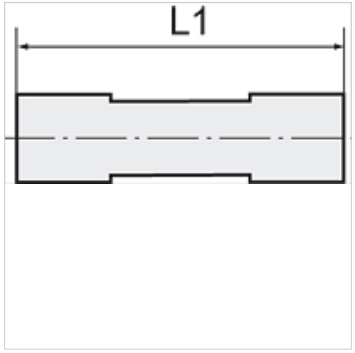

Indicaţie

Alte date sunt disponibile la cerere.

Descriere

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

Articol

Denumire	Filet	pentru Ø exterior furtun	L1 (mm)
K- 07 40 25 26	M 13 x 1	4 mm / 6 mm	32,7
K- 07 40 25 27	M 15 x 1	4 mm / 8 mm	34,4
K- 07 40 25 28	M 15 x 1	6 mm / 8 mm	35,0
K- 07 40 25 29	M 17 x 1	6 mm / 10 mm	37,5
K- 07 40 25 30	M 20 x 1	6 mm / 12 mm	39,0
K- 07 40 25 31	M 17 x 1	8 mm / 10 mm	37,8
K- 07 40 25 32	M 20 x 1	8 mm / 12 mm	40,1
K- 07 40 25 33	M 20 x 1	10 mm / 12 mm	40,8

În pofida controlului minuțios nu putem exclude eventualele informații eronate și nu garantăm pentru datele cuprinse.