


# K-T-STECK VERS DRE AG OR VA

Male branch tees, swivel type, parallel male thread with O-ring

**HANSA FLEX**

## Caracteristici

|                                  |   |
|----------------------------------|---|
| Presiune de lucru pulsatorie     | Max. 10 bar   |
| Presiune                         | Max. 15 bar (depending on pipe quality)                         |
| Material adecvat pentru conductă | PVDF, PTFE, stainless steel, PA, PU                             |
| Standard                         | G thread acc. to DIN EN ISO 228-1, with O-Ring                  |
| Temperatură ambientală           | -20 °C to max. +150 °C (depending on pipe quality and diameter) |
| Material                         | Oțel superior 1.4404  |
| Material de etanșare             | FKM   |

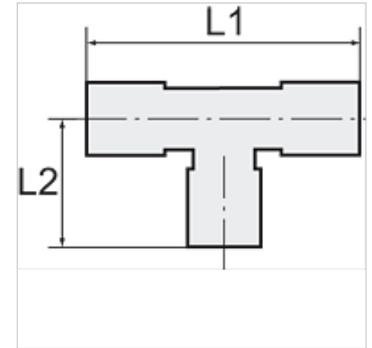

## Indicație

Alte date sunt disponibile la cerere.

## Descriere

For use with aggressive media and in areas with corrosive outside influences, in the food processing industry and in hygienic and sanitary applications.

## Articol

| Denumire       | Filet | pentru Ø exterior furtun | L1<br>(mm) | L2<br>(mm) | Deschiderea cheii fixe |
|----------------|-------|--------------------------|------------|------------|------------------------|
| K- 07 40 46 81 | M 5   | 4 mm                     | 34,0       | 18,0       | 9 mm                   |
| K- 07 40 24 52 | G 1/8 | 4 mm                     | 34,0       | 20,0       | 13 mm                  |
| K- 07 40 24 53 | G 1/8 | 6 mm                     | 42,0       | 22,5       | 13 mm                  |
| K- 07 40 24 54 | G 1/8 | 8 mm                     | 43,0       | 22,5       | 13 mm                  |
| K- 07 40 24 50 | G 1/4 | 6 mm                     | 42,0       | 24,5       | 16 mm                  |
| K- 07 40 24 51 | G 1/4 | 8 mm                     | 43,0       | 24,5       | 16 mm                  |
| K- 07 40 24 49 | G 1/4 | 10 mm                    | 50,0       | 25,5       | 16 mm                  |
| K- 07 40 24 55 | G 3/8 | 10 mm                    | 50,0       | 27,0       | 21 mm                  |