
K-XG LOESBAR IG IG FLACHDICHT

Detachable double nipples, female, flat seat

Caracteristici

Presiune de lucru	Max. 10 bar
Filet exterior	Parallel to DIN EN ISO 228-1
Filet interior	Parallel to DIN EN ISO 228-1
Material	Stainless steel 1.4408



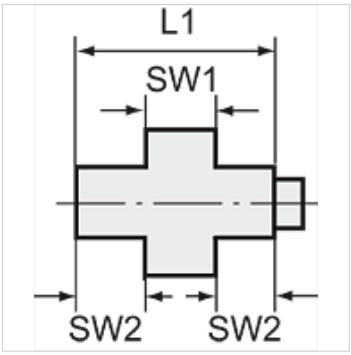

Indicaţie

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
Alte date sunt disponibile la cerere.

Articol

Denumire	Filet	L1 (mm)	Deschiderea cheii 1 (mm)	Deschiderea cheii 2 (mm)
K- 07 40 45 85	G 1/8	32,3	29	18
K- 07 40 45 94	G 1/4	32,4	29	18
K- 07 40 45 95	G 3/8	34,7	34	22
K- 07 40 46 00	G 1/2	40,0	39	26
K- 07 40 46 01	G 3/4	42,0	47	32
K- 07 40 46 02	G 1	48,7	58	40
K- 07 40 46 03	G 1 1/4	54,0	67	49
K- 07 40 46 04	G 1 1/2	58,9	76	56
K- 07 40 46 05	G 2	62,2	90	68

În pofida controlului minuțios nu putem exclude eventualele informații eronate și nu garantăm pentru datele cuprinse.