


K-XG LOESBAR IG IG FLACHDICHT

Detachable double nipples, female, flat seat

HANSA FLEX

Caracteristici

| | |
|-------------------|------------------------------|
| Presiune de lucru | Max. 10 bar |
| Filet exterior | Parallel to DIN EN ISO 228-1 |
| Filet interior | Parallel to DIN EN ISO 228-1 |
| Material | Stainless steel 1.4408 |

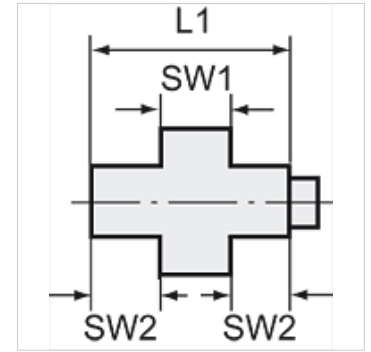

Indicație

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
Alte date sunt disponibile la cerere.

Articol

| Denumire | Filet | L1 (mm) | Deschiderea cheii 1 (mm) | Deschiderea cheii 2 (mm) |
|----------------|---------|------------|-----------------------------|-----------------------------|
| K- 07 40 45 85 | G 1/8 | 32,3 | 29 | 18 |
| K- 07 40 45 94 | G 1/4 | 32,4 | 29 | 18 |
| K- 07 40 45 95 | G 3/8 | 34,7 | 34 | 22 |
| K- 07 40 46 00 | G 1/2 | 40,0 | 39 | 26 |
| K- 07 40 46 01 | G 3/4 | 42,0 | 47 | 32 |
| K- 07 40 46 02 | G 1 | 48,7 | 58 | 40 |
| K- 07 40 46 03 | G 1 1/4 | 54,0 | 67 | 49 |
| K- 07 40 46 04 | G 1 1/2 | 58,9 | 76 | 56 |
| K- 07 40 46 05 | G 2 | 62,2 | 90 | 68 |