

K-XG LOESBAR IG AG

Detachable double nipples, female-male, flat seat

Caracteristici

Presiune de lucru	Max. 10 bar
Filet exterior	Parallel to DIN EN ISO 228-1
Filet interior	Parallel to DIN EN ISO 228-1
Material	Stainless steel 1.4408

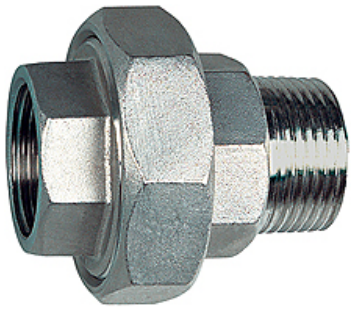

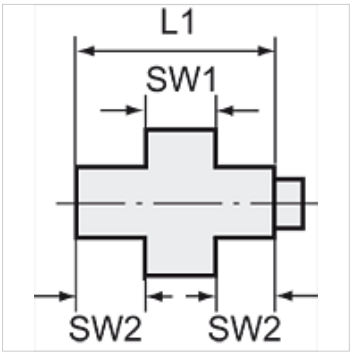

Indicație

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
Alte date sunt disponibile la cerere.

Articol

Denumire	Filet	L1 (mm)	Deschiderea cheii 1 (mm)	Deschiderea cheii 2 (mm)
K- 07 40 46 06	G 1/8	42,3	29	18
K- 07 40 46 15	G 1/4	43,0	29	18
K- 07 40 46 16	G 3/8	46,0	34	22
K- 07 40 46 21	G 1/2	56,0	39	26
K- 07 40 46 22	G 3/4	59,7	47	32
K- 07 40 46 23	G 1	67,0	58	40
K- 07 40 46 24	G 1 1/4	76,0	67	49
K- 07 40 46 25	G 1 1/2	81,0	76	56
K- 07 40 46 26	G 2	89,0	90	68

În pofida controlului minuțios nu putem exclude eventualele informații eronate și nu garantăm pentru datele cuprinse.