
3 BKR ND L

Ventil cu bilă pe 3 căi în variantă cu presiune joasă

Caracteristici

Racord 1 - 3	Filete cilindrice interioare BSP
Formă de etanşare 1 - 3	Formă A
Gaură	Formă de L
Cursă de cuplare	0°; 90°
Domeniu de temperaturi	Apă: de la 0 °C până la + 150 °C Aer: - 20 °C până la + 150 °C
Protecţia suprafeţei	nichelat
Material	Carcasă din alamă Mâner din aluminiu Bilă din alamă, cromată dur Garnitură sferică din PTFE



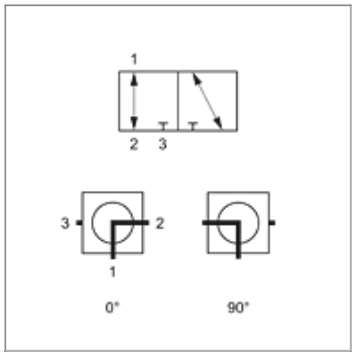

Indicaţii referitoare comandă

Alte valori referitoare la presiune şi temperatură, la cerere.

Articol

Denumire	DN*	Filet de conectare	Presiune de lucru (bar)
3 BKR 06 ND L	6	G 1/4" -19	25,0
3 BKR 10 ND L	10	G 3/8" -19	25,0
3 BKR 13 ND L	12	G 1/2" -14	25,0
3 BKR 20 ND L	19	G 3/4" -14	25,0
3 BKR 25 ND L	25	G 1" -11	25,0
3 BKR 32 ND L	31	G 1.1/4" -11	25,0
3 BKR 40 ND L	38	G 1.1/2" -11	25,0
3 BKR 50 ND L	50	G 2" -11	25,0

DN = diametru nominal

Piese de schimb

ND GRIFF	Mâner pentru ventil cu bilă ND

În pofida controlului minuţios nu putem exclude eventualele informaţii eronate şi nu garantăm pentru datele cuprinse.