


K-3WBK HANSA PRO

3/2-way ball valve, HANSA PRO

HANSA FLEX

Caracteristici

| | |
|-----------------------|----------------------------------------------|
| Medii | Aer comprimat |
| Tip de fixare | Line mounting, mounting kit or wall mounting |
| Acționare / siguranță | lockable with key lock |
| Poziție de montare | Any |
| Debit nominal G 1/2 | 11.000 l/min (P1 = 6 bar/Delta P = 1 bar) |
| Debit nominal G 3/8 | 7.250 l/min (P1 = 6 bar/Delta P = 1 bar) |
| PE max 11 | 16 bar |

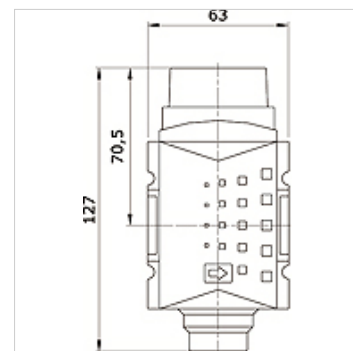

Articol

| Denumire | Racord | Dimensiunea constructivă |
|----------------|---------|--------------------------|
| K- 07 25 22 54 | G 3/8 i | 2 |
| K- 07 25 22 55 | G 1/2 i | 2 |

Accesorii

K-STECKSCHLOSS Key lock