


K-G STECK 20-63 AG INFI

Straight push-in connector Ø 20 mm – Ø 63 mm with external thread

HANSA FLEX

Caracteristici

| | |
|------------------------|-------------------------------------|
| Medii | Compressed air, vacuum, inert gases |
| Presiune de lucru | -0,99 bar - 15 bar |
| Domeniu de temperaturi | -20 °C to +80 °C |
| Garnitură de etanșare | NBR |
| Carcasă | Nickel-plated brass |
| Inel de fixare | Stainless steel 1.4301 |
| Piuliță | Nickel-plated brass |
| Inel O | NBR |
| Inele de siguranță | Technopolymer |

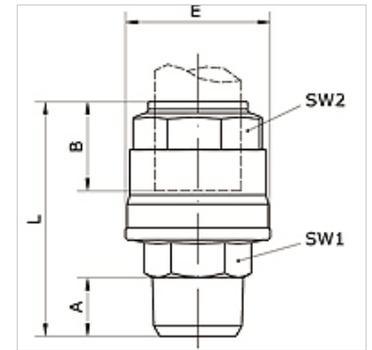

Articol

| Denumire | Ø exterior țevă | Racord | A (mm) | B (mm) | E (mm) | L (mm) | Deschiderea cheii 1 (mm) | Deschiderea cheii 2 (mm) |
|----------------|-----------------|---------|-----------|-----------|-----------|-----------|-----------------------------|-----------------------------|
| K- 07 40 53 37 | 20 mm | R 1/2 | 14,0 | 31,5 | 34,5 | 56,0 | 22 | 30 |
| K- 07 40 53 38 | 25 mm | R 3/4 | 16,5 | 38,5 | 42,5 | 66,0 | 27 | 35 |
| K- 07 40 53 39 | 32 mm | R 1 | 19,0 | 46,0 | 52,0 | 76,5 | 34 | 45 |
| K- 07 40 53 40 | 40 mm | R 1 1/4 | 21,5 | 52,0 | 63,0 | 89,5 | 45 | 55 |
| K- 07 40 53 41 | 40 mm | R 1 1/2 | 21,5 | 52,0 | 63,0 | 92,0 | 50 | 55 |
| K- 07 40 53 42 | 50 mm | R 1 1/2 | 21,5 | 63,5 | 73,0 | 105,0 | 50 | 65 |