


# K-T-STECK VB 80-100 SCHANH RED INFI

T-push-in connector Ø 80 mm/Ø 110 mm with integrated gooseneck and reduced outlet with female thread

**HANSA FLEX**

## Caracteristici

<b>Medii</b>	Compressed air, vacuum, inert gases
<b>Presiune de lucru</b>	-0,99 bar - 15 bar
<b>Domeniu de temperaturi</b>	-20 °C to +80 °C
<b>Inel de ghidare</b>	Technopolymer
<b>Carcasă</b>	Aluminium, treated surface
<b>Șurub inbus</b>	Galvanised steel
<b>Inel de fixare</b>	Stainless steel 1.4301
<b>Piuliță</b>	Aluminium, surface treated
<b>Inel O</b>	NBR
<b>Piuliță autoasigurantă</b>	Galvanised steel
<b>Inele de siguranță</b>	Technopolymer

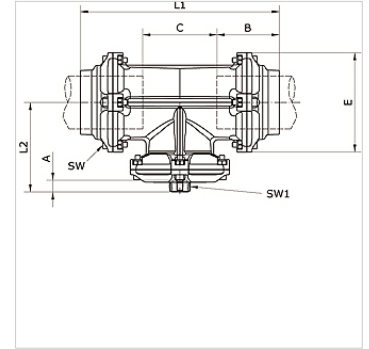

## Articol

Denumire	Ø exterior țevă	Racord	A (mm)	B (mm)	C (mm)	E (mm)	L1 (mm)	L2 (mm)	SW (mm)	Deschiderea cheii 1 (mm)
<b>K- 07 40 55 17</b>	80 - 80 mm	G 3/4	14,5	91,0	109,0	145,0	291,5	138,0	6	42
<b>K- 07 40 55 18</b>	80 - 80 mm	G 1	17,0	91,0	109,0	145,0	291,5	138,0	6	49
<b>K- 07 40 55 19</b>	80 - 80 mm	G 1 1/2	20,0	91,0	109,0	145,0	291,5	138,0	6	66
<b>K- 07 40 55 20</b>	80 - 80 mm	G 2	22,0	91,0	109,0	145,0	291,5	138,0	6	80
<b>K- 07 40 54 69</b>	110 - 110 mm	G 3/4	14,5	125,5	150,5	200,0	401,0	180,0	8	42
<b>K- 07 40 54 70</b>	110 - 110 mm	G 1	17,0	125,5	150,5	200,0	401,0	180,0	8	49
<b>K- 07 40 54 71</b>	110 - 110 mm	G 1 1/2	20,0	125,5	150,5	200,0	401,0	180,0	8	66
<b>K- 07 40 54 72</b>	110 - 110 mm	G 2	22,0	125,5	150,5	200,0	401,0	180,0	8	80