


K-VERTEILER 4-FACH HANSA PRO

Distributor 4-fold, HANSA PRO

HANSA FLEX

Caracteristici

| | |
|-----------------------------|--|
| Temperatură mediu | -10 °C to +50 °C |
| Temperatură ambientală | -10 °C to +50 °C |
| Medii | Aer comprimat |
| Tip de fixare | Line mounting, mounting kit or wall mounting |
| Poziție de montare | Any |
| Debit nominal G 1/2 | 11.000 l/min (P1 = 6 bar/Delta P = 1 bar) |
| Debit nominal G 3/8 | 7.250 l/min (P1 = 6 bar/Delta P = 1 bar) |
| Debit nominal spate (P – E) | 2.250 l/min (P1 = 6 bar/Delta P = 1 bar) |
| Debit nominal sus (P – D) | 2.250 l/min (P1 = 6 bar/Delta P = 1 bar) |
| Debit nominal jos (P – B) | 5.500 l/min (P1 = 6 bar/Delta P = 1 bar) |
| Debit nominal față (P – C) | 2.250 l/min (P1 = 6 bar/Delta P = 1 bar) |
| PE max 11 | 16 bar |
| Carcasă | PA66 |

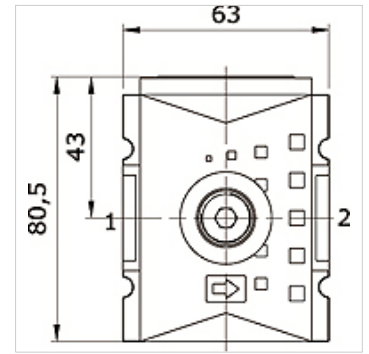

Articol

| Denumire | Racord P + A | Racord B | Racord C | Racord D | Racord E | Dimensiunea constructivă |
|----------------|--------------|----------|----------|----------|----------|--------------------------|
| K- 07 25 22 46 | G 3/8 i | G 1/2 i | G 3/8 i | G 1/4 i | G 3/8 i | 2 |
| K- 07 25 22 47 | G 1/2 i | G 1/2 i | G 3/8 i | G 1/4 i | G 3/8 i | 2 |