
K-PNEUMA KOMPAKTSCHLITTEN MXS

Air Slide Table MXS

HANSA-FLEX

Caracteristici

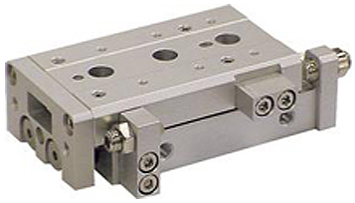

presiune max. de lucru	0,7 MPa
Presiune de lucru min.	0.15 MPa
Amortizare	elastic stop
Funcţie	double working
Presiunea de încercare	1,05 MPa
Temperatură mediu	-10 °C to +60 °C
Temperatură ambientală	-10 °C to +60 °C
Viteza pistonului	50 to 500 mm/s
Medii	Aer comprimat
Serie	MXS
Alte date	Carriage and air cylinder as a complete unit Ideal for precision assembly applications High resistance to the cultivation of loads

Descriere

Compact air slide table, series MXS, slide table and air cylinder as complete unit, ideal for precise installation applications, high resistance capacity when building up loads, with stroke limiting unit or shock absorber, (order separately), no stroke adjustment, double action, piston diameter / stroke: 20/100 mm, connection size: G 1/8

Articol

Denumire	Ø piston (mm)	Cursa (mm)	Racord pneumatic	Masă (kg)
K- 07 55 01 46	6	10	M 3	0,080
K- 07 55 01 47	6	20	M 3	0,100
K- 07 55 01 48	6	30	M 3	0,115
K- 07 55 01 49	6	40	M 3	0,155
K- 07 55 01 50	6	50	M 3	0,180
K- 07 55 01 52	8	10	M 5	0,150
K- 07 55 01 53	8	20	M 5	0,160
K- 07 55 01 54	8	30	M 5	0,190
K- 07 55 01 55	8	40	M 5	0,235
K- 07 55 01 56	8	50	M 5	0,285
K- 07 55 01 57	8	75	M 5	0,410
K- 07 55 01 27	12	10	M 5	0,325
K- 07 55 01 29	12	20	M 5	0,325
K- 07 55 01 30	12	30	M 5	0,325
K- 07 55 01 31	12	40	M 5	0,385
K- 07 55 01 32	12	50	M 5	0,485
K- 07 55 01 33	12	75	M 5	0,660
K- 07 55 01 28	12	100	M 5	0,890
K- 07 55 01 35	16	10	M 5	0,570
K- 07 55 01 38	16	20	M 5	0,570
K- 07 55 01 39	16	30	M 5	0,580
K- 07 55 01 40	16	40	M 5	0,640
K- 07 55 01 41	16	50	M 5	0,760
K- 07 55 01 42	16	75	M 5	1,090
K- 07 55 01 36	16	100	M 5	0,770
K- 07 55 01 37	16	125	M 5	0,900
K- 07 55 00 01	20	10	G 1/8	0,960
K- 07 55 00 05	20	20	G 1/8	0,980
K- 07 55 00 06	20	30	G 1/8	1,010
K- 07 55 00 07	20	40	G 1/8	1,100
K- 07 55 00 08	20	50	G 1/8	1,250
K- 07 55 00 09	20	75	G 1/8	-
K- 07 55 00 02	20	100	G 1/8	2,150
K- 07 55 00 03	20	125	G 1/8	2,670
K- 07 55 00 04	20	150	G 1/8	3,190

În pofida controlului minuţios nu putem exclude eventualele informaţii eronate şi nu garantăm pentru datele cuprinse.

K-PNEUMA KOMPAKTSCHLITTEN MXS

Air Slide Table MXS

HANSA-FLEX

Articol

Denumire	Ø piston (mm)	Cursa (mm)	Racord pneumatic	Masă (kg)
K- 07 55 00 10	25	10	G 1/8	1,660
K- 07 55 00 14	25	20	G 1/8	1,680
K- 07 55 00 15	25	30	G 1/8	1,690
K- 07 55 00 16	25	40	G 1/8	1,840
K- 07 55 00 17	25	50	G 1/8	2,090
K- 07 55 00 18	25	75	G 1/8	2,650
K- 07 55 00 11	25	100	G 1/8	3,270
K- 07 55 00 12	25	125	G 1/8	4,140
K- 07 55 00 13	25	150	G 1/8	4,170

În pofida controlului minuțios nu putem exclude eventualele informații eronate și nu garantăm pentru datele cuprinse.