
K-DBV MANO 1/2"

Pressure limiting valves size 1/2

Caracteristici

Tip constructiv	Spring-loaded, non-return diaphragm valve with adjustable opening pressure
Temperatură mediu	max. 60 °C
Temperatură ambientală	Max. 60 °C
Material de etanşare	NBR
Apărătoare de arc	POM/brass
Carcasă	Die-cast zinc, painted silver
Membrană	NBR



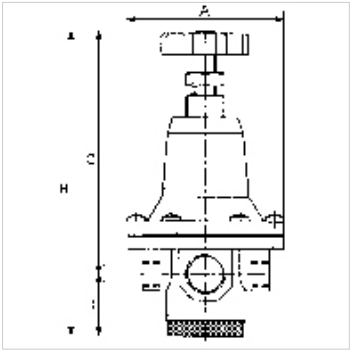

Indicaţie

Alte date sunt disponibile la cerere.

Descriere

Manually adjustable overflow valves.For protecting pneumatic systems against damage caused by excess pressure.

Articol

Denumire	Filet	Domeniu de reglare	A (mm)	B	C (mm)	D (mm)
K- 07 25 01 97	G 1/2	0.5 - 3.0 bar	82,0	162,0 mm	129,0	33,0
K- 07 25 01 98	G 1/2	0.5 - 5.5 bar	82,0	162,0 mm	129,0	33,0
K- 07 25 01 99	G 1/2	0.5 - 10.0 bar	82,0	162,0 mm	129,0	33,0

Piese de schimb

K-HALTERBAUSATZ STANDARD	Holder
K-GERAETESTECKER	Coupling socket
K-SCHALLDAE SINTERBR AG 569	Silencers, sintered bronze, flat type with male thread, 569 Series
K-VERSCHLEI-SATZ	Set of wearing parts
K-KM MS	Hexagonal lock nuts, brass

În pofida controlului minuțios nu putem exclude eventualele informații eronate și nu garantăm pentru datele cuprinse.