

K-T-VB MS NI

Union tees



HANSA FLEX

Caracteristici

Presiune de lucru Max. 18 bar

Material de etanșare Buna-N

Material Alamă nichelată

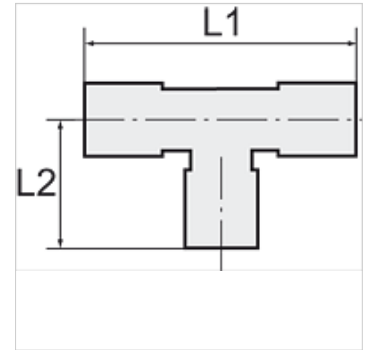

Indicație

Alte date sunt disponibile la cerere.

Articol

Denumire	pentru furtun	L1 (mm)	Deschiderea cheii fixe
K- 07 40 32 16	4 mm / 2 mm	49,0	9 mm
K- 07 40 32 17	5 mm / 3 mm	43,0	8 mm
K- 07 40 32 18	6 mm / 4 mm	44,0	9 mm
K- 07 40 32 19	8 mm / 6 mm	44,0	10 mm
K- 07 40 32 14	10 mm / 8 mm	50,0	12 mm
K- 07 40 32 15	12 mm / 10 mm	62,0	17 mm