

K-GRUNDEJEKTION SBP-C ELK

Basic ejector »SBP-C« with blow-off valve and electronic vacuum switch, with integrated silencer

Свойства

Свойства	Vacuum generator with a single nozzle, available in six power ratings, with a high maximum vacuum value (85%) Connection of compressed air and vacuum with push-in coupling Basic housing with connection facility for a vacuum switch Maximum suction capacity with minimum compressed air consumption Minimum size, low weight Various power ratings for optimised air consumption
Применение	For universal use in handling systems with very high dynamic movements Handling all kinds of air-tight components For use in separation systems where space is restricted. \nConstruction of ejector blocks for centralised or decentralised individual control of suction pads.
Система форсунок	Brass
Соединение	Push-in coupling
Глушитель	Plastic
Основные части	Impact-resistant plastic

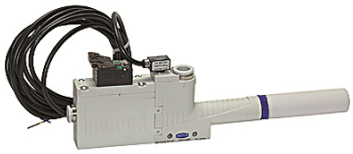

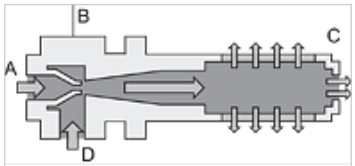

Указание

Прочие данные только по запросу.

Описание

Purely pneumatic vacuum ejector that operates on the Venturi principle. Compressed air enters the ejector at A and flows through the nozzle B. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet D. This air and the driving air leave the ejector via the silencer C.

Изделие

Наименование	Размер форсунки	Состояние покоя всасывающего клапана	Подключение системы сжатого воздуха	Вакуумное соединение	Размер
K- 07 45 01 20	1,0	NO	6 mm	8 mm	142mm x 15mm x 50mm
K- 07 45 01 22	1,5	NO	6 mm	8 mm	142mm x 15mm x 50mm
K- 07 45 01 24	2,0	NO	8 mm	10 mm	228mm x 20mm x 72mm
K- 07 45 01 26	2,5	NO	8 mm	10 mm	228mm x 20mm x 72mm

Принадлежности

K-ERSATZSCHALLDAEMPFER 1	Replacement silencers
K-GRUNDPLATTEN 1	Base plate
K-BEFESTIGUNGSSAETZE 1	Mounting kit

Несмотря на тщательную проверку мы не может исключить ошибки, поэтому мы не берем на себя ответственность за содержащуюся информацию.