


K-INLINE-EJEKTTOREN VR

Inline ejectors »VR«, screw connection

HANSA**FLEX**

Свойства

Свойства	Vacuum generator with high maximum vacuum level (85% vacuum) No moving parts, which means no wear and no maintenance ultra small footprint, suitable for confined spaces minimal air consumption low noise
Применение	by screwing / plugging into the distribution beam direct attachment to the suction pad for handling various workpieces
Корпус	Aluminium eloxed (type VR)
Система форсунок	Brass (type VR)
Соединение	Вставное соединение

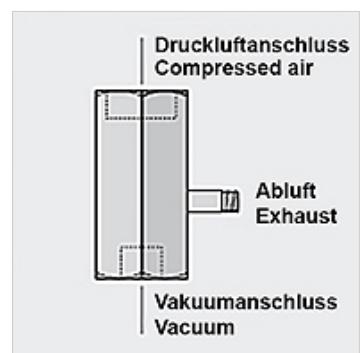

Указание

Прочие данные только по запросу.

Описание

For vacuum generation directly at the point of use. For direct installation between the suction pad and the compressed air supply. Purely pneumatic vacuum generator that operates on the Venturi principle. Compressed air enters the ejector and flows through a nozzle. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet. This air and the driving air leave the ejector and enter the atmosphere via the exhaust air outlet.

Изделие

Наименование	Размер форсунки	Подключение к системе вытяжной вентиляции	Подключение системы сжатого воздуха	Вакуумное соединение	Степень разрежения при всасывании	Расход воздуха	макс. скорость откачки	Длина	Рабочее давление
K-07 45 01 29	0,7	M 5 male	G 1/4 IG	G1/8 female	90 %	21,0	14,0	35,0	5,0
K-07 45 01 30	0,9	M 5 male	G 1/4 IG	G1/8 female	89 %	36,0	21,0	35,0	5,0