


K-SAUGPLATTENAUFHAENGUNG

Flexible suction pad mountings

HANSA/FLEX

Свойства

| | |
|------------------------|--|
| Применение | For handling of workpieces with sloping using large-area vacuum gripper Handling of large plates that can sag when lifting In combination with spring plungers to compensate height-differences and Unevenness |
| Особые признаки | very good adaptation to oblique workpiece surfaces automatic Rückstellung in die Ausgangslage vacuum-tight design with integrated protection against damage |

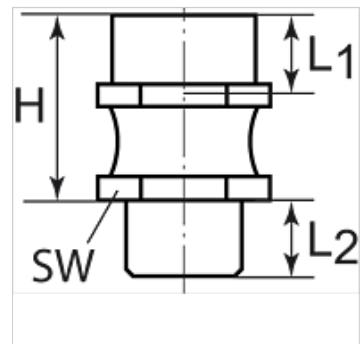

Указание

Прочие данные только по запросу.

Описание

Flexible suction pad mounting. By flexing in all directions, this mounting allows the suction pad to better adapt itself to sloping workpieces.

Изделие

| Наименование | Резьба 1 внутренняя | Резьба 2 наружная | H (mm) | Материал | L1 (mm) | L2 (mm) | Угол W (°) | Вертикальная нагрузка (N/m ²) | Момент изгиба (N/m ²) | SW (mm) |
|---------------|------------------------|----------------------|-----------|---------------|------------|------------|---------------|---|---|------------|
| K-07 45 01 47 | G 1/4 | M 10 x 1.25 | 27,0 | Steel, rubber | 10,5 | 8,0 | 12 | 500 | 8,0 | 17 |
| K-07 45 01 48 | G 1/4 | G 1/4 | 27,0 | Steel, rubber | 12,0 | 12,0 | 12 | 750 | 10,0 | 17 |