

K-SAUGPLATTENAUFHAENGUNG


Flexible suction pad mountings

HANSA FLEX

Свойства

Применение For handling of workpieces with sloping using large-area vacuum gripper
Handling of large plates that can sag when lifting
In combination with spring plungers to compensate height-differences and Uneveness

Особые признаки very good adaptation to oblique workpiece surfaces
automatic Rückstellung in die Ausgangslage
vacuum-tight design with integrated protection against damage

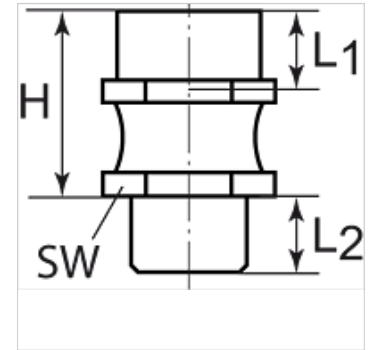

Указание

Прочие данные только по запросу.

Описание

Flexible suction pad mounting. By flexing in all directions, this mounting allows the suction pad to better adapt itself to sloping workpieces.

Изделие

| Наименование | Резьба 1 внутренняя | Резьба 2 наружная | H (mm) | Материал | L1 (mm) | L2 (mm) | Угол W (°) | Вертикальная нагрузка (N/m ²) | Момент изгиба (N/m ²) | SW (mm) |
|----------------|------------------------|----------------------|-----------|---------------|------------|------------|---------------|---|---|------------|
| K- 07 45 01 47 | G 1/4 | M 10 x 1.25 | 27,0 | Steel, rubber | 10,5 | 8,0 | 12 | 500 | 8,0 | 17 |
| K- 07 45 01 48 | G 1/4 | G 1/4 | 27,0 | Steel, rubber | 12,0 | 12,0 | 12 | 750 | 10,0 | 17 |