


K-SSV BR

Angle-seat valves with piston actuator

HANSA FLEX

Свойства

Перепад давления	0 - 16 bar
Температура среды	-10 °C to +180 °C
Патрубок для подключения управляющего воздуха	G 1/8
Температура регулирующей среды	max. +60 °C
Температура окружающей среды	-20 °C to +70 °C
допустимое статическое давление	Max. 16 bar
Корпус клапана	Bronze
Соединительный элемент	Stainless steel
Распределительная головка	Polyamide (glass fibre-reinforced)
Поршни	Nickel-plated brass (DN 15 to DN 32), PBT + GF 30% (DN 40 to DN 50)
Шпindelь	Stainless steel
Набивочный материал	PTFE

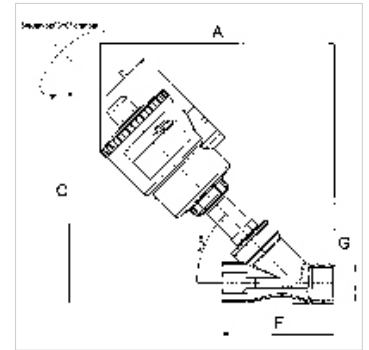

Указание

G thread acc. to DIN EN ISO 228-1, with ISO flange plate (acc. to ISO 5211)

For use on devices that have to be vented whenever they are turned off, either because of safety regulations or for technical reasons. The pneumatic devices are disconnected from the system and simultaneously vented each time they are shut off.

Прочие данные только по запросу.

Описание

Angle-seat valves with external pilot control and a self-aligning valve disc for neutral (bronze body) or corrosive (stainless steel body) media. Very high flow due to angled seat design, Water hammer prevented by fluid entry under the disc, Suitable for vacuum operation (low vacuum), NAMUR interface on the piston actuator. 3/2 and 5/2-way valves can be mounted directly.

Дополнительная информация

Other versions e.g. for steam on request

Information on max. operating differential pressures apply for air, gas, corrosive aggressive media, water

Изделие

Наименование	A (mm)	C (mm)	F (mm)	Резьба	макс. перепад рабочего давления (bar)	мин. управляющее давление	макс. управляющее давление
K- 07 30 25 24	163,0	153,0	65,0	G 1/2	16	4	10
K- 07 30 25 25	173,0	163,0	75,0	G 3/4	10	4	10
K- 07 30 25 26	191,0	181,0	75,0	G 3/4	16	4	10
K- 07 30 25 27	206,0	196,0	90,0	G 1	11	4	10
K- 07 30 25 28	246,0	236,0	90,0	G 1	16	4	8
K- 07 30 25 29	255,0	245,0	110,0	G 1 1/4	14	4	8
K- 07 30 25 30	270,0	264,0	120,0	G 1 1/2	11	4	8
K- 07 30 25 31	306,0	300,0	120,0	G 1 1/2	16	4	8
K- 07 30 25 32	316,0	311,0	150,0	G 2	10	4	8