



K-GAR IG

Female connectors with female G thread

HANSA FLEX

Свойства

Рабочее давление	Dependent on operating temperature; Max. 10 bar (at 20 °C); Max. 1 bar (at 60 °C)
Резьбовые детали	Polyamide (PA)
Зажимное кольцо	Polypropylene (PP)
Гайка	Polypropylene (PP)

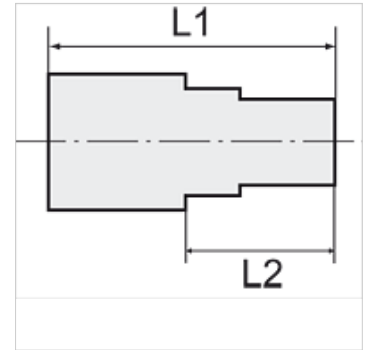

Указание

Прочие данные только по запросу.

Описание

Manufactured from high impact-resistant, UV-stabilised engineering plastic, extremely resistant to weathering. Good chemical resistance to benzene, diesel oil, fuel oil and alkalis.
Not suitable for use with acids.

Изделие

Наименование	Резьба	Для шланга	L1 (mm)	L2 (mm)	SW
K- 07 40 32 46	G 1/8	4 mm / 6 mm	31,0	17,0	14 mm
K- 07 40 32 47	G 1/8	6 mm / 8 mm	36,0	21,0	17 mm
K- 07 40 32 48	G 1/8	8 mm / 10 mm	39,0	24,0	19 mm
K- 07 40 32 49	G 1/8	9 mm / 12 mm	43,0	28,0	22 mm
K- 07 40 32 50	G 1/4	4 mm / 6 mm	36,0	17,0	17 mm
K- 07 40 32 51	G 1/4	6 mm / 8 mm	41,0	21,0	17 mm
K- 07 40 32 52	G 1/4	8 mm / 10 mm	44,0	24,0	19 mm
K- 07 40 32 53	G 1/4	9 mm / 12 mm	48,0	28,0	22 mm
K- 07 40 32 54	G 3/8	4 mm / 6 mm	36,0	17,0	22 mm
K- 07 40 32 55	G 3/8	6 mm / 8 mm	41,0	21,0	22 mm
K- 07 40 32 56	G 3/8	8 mm / 10 mm	44,0	24,0	22 mm
K- 07 40 32 57	G 3/8	9 mm / 12 mm	48,0	28,0	22 mm
K- 07 40 32 58	G 1/2	4 mm / 6 mm	38,0	17,0	27 mm
K- 07 40 32 59	G 1/2	6 mm / 8 mm	42,0	21,0	27 mm
K- 07 40 32 60	G 1/2	8 mm / 10 mm	44,0	24,0	27 mm
K- 07 40 32 61	G 1/2	9 mm / 12 mm	49,0	28,0	27 mm