


# K-W90 AG-K ISO 7-1 3

Male elbows, conical male thread acc. to ISO 7-1

**HANSA FLEX**

## Свойства

|                   |                       |
|-------------------|-----------------------|
| Диапазон давлений | Max. 60 bar           |
| Температура       | Max. 150 °C           |
| Материал          | Никелированная латунь |

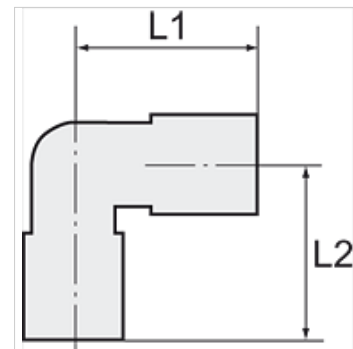

## Указание

Прочие данные только по запросу.

## Изделие

| Наименование   | Наружный Ø трубы | Резьба | L1<br>(mm) | L2<br>(mm) | SW    | SW1<br>(mm) |
|----------------|------------------|--------|------------|------------|-------|-------------|
| K- 07 40 20 59 | 4 mm             | R 1/8  | 21,0       | 16,0       | 9 mm  | 10          |
| K- 07 40 20 60 | 6 mm             | R 1/8  | 22,0       | 16,0       | 9 mm  | 12          |
| K- 07 40 20 61 | 8 mm             | R 1/8  | 24,0       | 17,0       | 11 mm | 14          |
| K- 07 40 20 62 | 6 mm             | R 1/4  | 24,5       | 20,0       | 11 mm | 12          |
| K- 07 40 20 63 | 8 mm             | R 1/4  | 24,0       | 20,0       | 11 mm | 14          |
| K- 07 40 20 64 | 10 mm            | R 1/4  | 32,0       | 23,5       | 13 mm | 19          |
| K- 07 40 20 65 | 8 mm             | R 3/8  | 27,0       | 24,0       | 13 mm | 14          |
| K- 07 40 20 66 | 10 mm            | R 3/8  | 32,0       | 24,0       | 13 mm | 19          |
| K- 07 40 20 67 | 12 mm            | R 3/8  | 34,5       | 25,5       | 15 mm | 22          |
| K- 07 40 19 79 | 10 mm            | R 1/2  | 34,0       | 28,5       | 15 mm | 19          |
| K- 07 40 19 80 | 12 mm            | R 1/2  | 34,5       | 28,5       | 15 mm | 22          |
| K- 07 40 19 81 | 15 mm            | R 1/2  | 38,0       | 30,0       | 17 mm | 27          |
| K- 07 40 19 82 | 18 mm            | R 1/2  | 44,0       | 34,0       | 22 mm | 32          |