


K-WTEH 3-TLG PC SCH MANO HANSA

Service units, 3-piece with polycarbonate bowl, bowl guard and pressure gauge

HANSA FLEX

Свойства

| | |
|-----------------------------|---|
| Входное давление | 1.5 - 16 bar |
| Выходное давление | 0.5 - 8 bar |
| Область температур | -10 °C to +50 °C |
| Рабочие среды | Сжатый воздух |
| Тонкость фильтрации | 5,00 µm |
| Соединительная резьба | Material: Die-cast zinc |
| Емкость | Polycarbonate (with bayonet lock) |
| Фильтрующий элемент | Cellpor (PE) |
| Корпус | Material: Grivory® (PA 66) |
| Мембрана | NBR |
| Защитная сетка | Polyamide |
| Капельная насадка | PA |
| Расход собственного воздуха | Max. 1.5 l/min (depending on secondary pressure) |
| Измерение расхода воздуха | At P1 = 10 bar, P2 = 6.3 bar and pressure drop Δp = 1 bar |

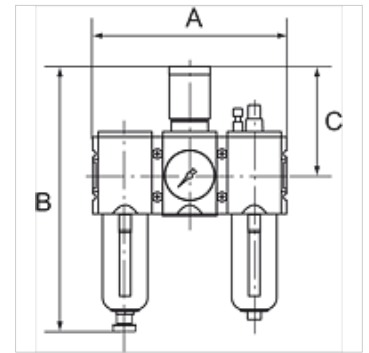

Указание

Прочие данные только по запросу.

Описание

Two or three-piece service units with excellent flow rates in modern design. Lockable diaphragm pressure regulator with secondary ventilation, oil can be filled without interrupting operation.

Указания по заказу

The price does not include a key lock. Please order separately.

Изделие

| Наименование | Резьба | Расход (L/min) | A (mm) | B | C (mm) | Отвод конденсата |
|----------------|--------|----------------|--------|----------|--------|------------------|
| K- 07 25 14 37 | G 1/4 | 1500 | 156,0 | 225,0 mm | 95,5 | Semi |
| K- 07 25 14 38 | G 3/8 | 1500 | 156,0 | 225,0 mm | 95,5 | Semi |
| K- 07 25 14 39 | G 3/8 | 3500 | 189,0 | 257,0 mm | 110,0 | Semi |
| K- 07 25 14 40 | G 1/2 | 3500 | 189,0 | 257,0 mm | 110,0 | Semi |
| K- 07 25 14 41 | G 3/4 | 12000 | 255,0 | 329,0 mm | 137,0 | Semi |
| K- 07 25 14 42 | G 1 | 12000 | 255,0 | 329,0 mm | 137,0 | Semi |
| K- 07 25 14 43 | G 1/4 | 1500 | 156,0 | 243,0 mm | 95,5 | Auto |
| K- 07 25 14 44 | G 3/8 | 1500 | 156,0 | 243,0 mm | 95,5 | Auto |
| K- 07 25 14 45 | G 3/8 | 3500 | 189,0 | 274,0 mm | 110,0 | Auto |
| K- 07 25 14 46 | G 1/2 | 3500 | 189,0 | 274,0 mm | 110,0 | Auto |
| K- 07 25 14 47 | G 3/4 | 12000 | 255,0 | 343,0 mm | 137,0 | Auto |
| K- 07 25 14 48 | G 1 | 12000 | 255,0 | 343,0 mm | 137,0 | Auto |

Принадлежности

K-STECKSCHLOSS Key lock

Запасные части

| | |
|------------------------------|-------------------------------|
| K-HALTERBAUSATZ HANSA | Holder HANSA |
| K-ERSATZBEHAELTER HANSA POLY | Spare tank HANSA polycarbonat |
| K-FILTERELEMENT | Filter element |
| K-TROPFAUFSATZ HANSA | Drip attachment HANSA |
| K-SCHALTTAFELMUTTER HANSA | Nut HANSA |
| K-DICHTSATZ HANSA | Set of seals HANSA |