


# K-WTEH 3-TLG PC-BEHAEL SCHUTZK MULT

Service units, 3-piece with polycarbonate bowl and bowl guard

**HANSA FLEX**

## Свойства

|                                   |  |
|-----------------------------------|--|
| Входное давление                  | Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl)     |
| Температура среды                 | max. 60 °C   |
| Температура окружающей среды      | Max. 60 °C   |
| Размер пор в фильтрующем элементе | 5 µm (BG 1 / BG 2), 40 µm (BG 3)                               |
| Набивочный материал               | Нитрильный каучук  |
| Пружинная крышка                  | POM-brass  |
| Корпус                            | Die-cast zinc, Aluminium for G 1 variant                       |
| Капельная насадка                 | PA (polycarbonate bowl), Zinc-glass-NBR (metal bowl)           |
| Drain valve                       | Semi-automatic   |
| Измерение расхода воздуха         | At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |

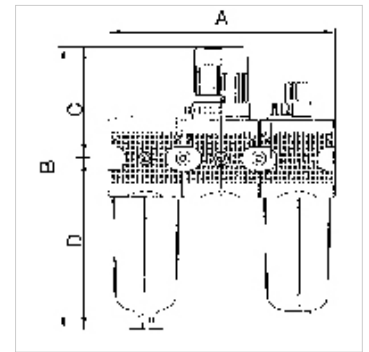

## Указание

Прочие данные только по запросу.

## Описание

Three-piece service units consisting of a reversible diaphragm pressure regulator, independent of inlet pressure, with self-relieving design, centrifugal separator and proportional lubricator.

## Указания по заказу

3-piece service units are also available in other control ranges (0.1 - 3 bar, 0.2 - 6 bar and 0.5 - 16 bar) and in lockable version. Please ask for more information.

## Дополнительная информация

1500 l/min: P1: 10 bar, P2: 7 bar,  $\Delta p \leq 0.1$  bar.

## Изделие

| Наименование   | Резьба | Диапазон регулирования | Расход (L/min) | A (mm) | B        | C (mm) | D (mm) | DN | Типоразмер |
|----------------|--------|------------------------|----------------|--------|----------|--------|--------|----|------------|
| K- 07 25 01 12 | G 1/4  | 0.5 - 10 bar           | 1100           | 137,8  | 192,1 mm | 67,0   | 125,1  | 6  | 1          |
| K- 07 25 01 15 | G 3/8  | 0.5 - 10 bar           | 1100           | 137,8  | 192,1 mm | 67,0   | 125,1  | 10 | 1          |
| K- 07 25 01 18 | G 1/2  | 0.5 - 10 bar           | 3000           | 200,8  | 246,3 mm | 99,0   | 147,3  | 15 | 2          |
| K- 07 25 01 21 | G 3/4  | 0.5 - 10 bar           | 3000           | 200,8  | 246,3 mm | 99,0   | 147,3  | 25 | 2          |
| K- 07 25 01 24 | G 1    | 0.5 - 10 bar           | 11300          | 300,0  | 381,4 mm | 128,0  | 253,8  | 25 | 3          |

## Запасные части

|                                  |                               |
|----------------------------------|-------------------------------|
| K-HALTERBAUSATZ                  | Holder                        |
| K-SCHALTAFELMUTTER               | Nut                           |
| K-HALTERBAUSATZ MULTIFIX         | Holder                        |
| K-KOPPELPAKET MEHR               | Coupling packet               |
| K-KOPPELPAKET SCHMA              | Coupling packet               |
| K-METALLBEHAELTER OELER MULTIFIX | Metal tank oiler              |
| K-PC-BEHAELTER FILTER MULTIFIX   | Polycarbonate tank filter     |
| K-SCHUTZKORB G                   | Protective cage               |
| K-TROPFAUFSATZ POLYCARBO 1       | Drip attachment polycarbonate |
| K-TROPFAUFSATZ METALL            | Drip attachment metal         |
| K-FILTERELEMENT                  | Filter element                |
| K-AUTOMAT ABLASSVENTIL           | Automatic drain valve         |
| K-VERSCHLEI-SATZ                 | Set of wearing parts          |