


# K-SCHALTVENTILE 3/2 VAROBLOC

On-off valves (3/2-way valves)

**HANSA FLEX**

## Свойства

|                           |  |
|---------------------------|--|
| Степень защиты            | IP 65 acc. to DIN 40050                            |
| Рабочее давление          | 3 to 10 bar  |
| Измерение расхода воздуха | At P1 = 6 bar and pressure drop $\Delta p = 1$ bar |

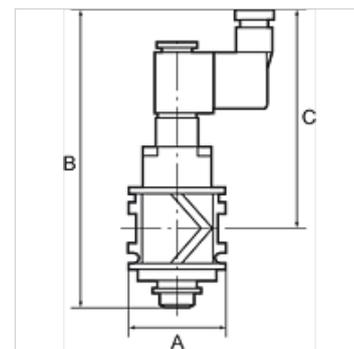

## Указание

Прочие данные только по запросу.

## Описание

For pressurising and relieving pneumatic systems. Ideal as the main "on" valve for service units. The pressure in the line is exhausted when the valve is switched off.

## Изделие

| Наименование   | Резьба | Расход (L/min) | A (mm) | Соединение                              | B        | C (mm) | Напряжение |
|----------------|--------|----------------|--------|---|----------|--------|------------|
| K- 07 25 11 94 | G 1/4  | 2200           | 48,0   | Device plug PG 9, type B, EN 175301-803 | 147,0 mm | 108,0  | 24 V DC    |
| K- 07 25 11 95 | G 3/8  | 2600           | 48,0   | Device plug PG 9, type B, EN 175301-803 | 147,0 mm | 108,0  | 24 V DC    |
| K- 07 25 11 96 | G 1/2  | 3300           | 70,0   | Device plug PG 9, type B, EN 175301-803 | 157,0 mm | 113,0  | 24 V DC    |
| K- 07 25 11 97 | G 3/4  | 3800           | 70,0   | Device plug PG 9, type B, EN 175301-803 | 157,0 mm | 113,0  | 24 V DC    |
| K- 07 25 11 98 | G 1    | 3800           | 124,0  | Device plug PG 9, type B, EN 175301-803 | 157,0 mm | 113,0  | 24 V DC    |

## Запасные части

|                         |                 |
|-------------------------|-----------------|
| K-MAGNETSPULE VARIOBLOC | Solenoid        |
| K-GERAETESTECKER        | Coupling socket |