
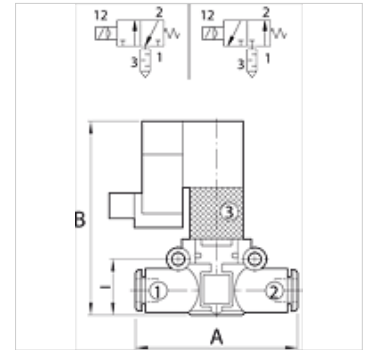


K-WMAV 3/2 GEFUE ENTLUEF SCHL SCHL

3/2-way solenoid valves, conveyed exhaust, pipe - pipe

HANSA FLEX

Свойства	
Рабочее давление	2.5 - 7 bar
Расход 6,3 бар, p=1 бар	380 NI/min (Ø 6), 700 NI/min (Ø 8)
Мощность	1,2 W
Напряжение	24 V DC
Область температур	-20 °C to +60 °C
Корпус	Technopolymer
Внутренние детали	nickel-plated brass, brass, \ntechnopolymer, stainless steel
Набивочный материал	Нитрильный каучук
Монтаж	Wall mounting (housing with drilled holes) Bracket mounting (mounting bracket available) Panel mounting (with bracket or lock nut)
Символ	on the housing



Указание

Прочие данные только по запросу.

Описание

A carefully selected assortment of products for installation in pneumatic circuits. These small, highly efficient components allow all pneumatic functions to be implemented anywhere in the circuit. The series has an ultramodular design.
All components can be installed in parallel, in series, in a mixed parallel / serial configuration. Available as Pipe / pipe connection with two plug connectors Thread / pipe connection, with one plug connector and one nickel-plated brass thread.

Изделие

Наименование	для шланга Ø (mm)	Функция	A (mm)	B (mm)	l (mm)
K- 07 15 13 87	6	NC	49,0	57,5	14,6
K- 07 15 13 88	8	NC	57,2	63,5	18,7
K- 07 15 13 89	6	NO	49,0	57,5	14,6
K- 07 15 13 90	8	NO	57,2	63,5	18,7