


K-NORMZYLINDER

Standard cylinders

HANSA FLEX

Свойства

Рабочие среды	Filtered, unlubricated or lubricated compressed air. If lubrication is used, it must be continuous.
Рабочее давление	Max. 10 bar
Давление реагирования	0,4 bar (Ø 32 bis Ø 40), 0,3 bar (Ø 50 bis Ø 63), 0,2 bar (Ø 80 bis Ø 125)
Область температур	-20 °C to +70 °C (Ø 32 to Ø 63) -10 °C to +70 °C (Ø 80 to Ø 125)
Монтаж	Heads / jacket with self-tapping screws
Поршневой шток	C45 steel, hard chrome-plated
Труба	Anodised aluminium jacket with integrated T-slots
Поршни	POM (Ø 20 to Ø 63); Aluminium (Ø 80 to Ø 125)
Набивочный материал	Нитрильный каучук

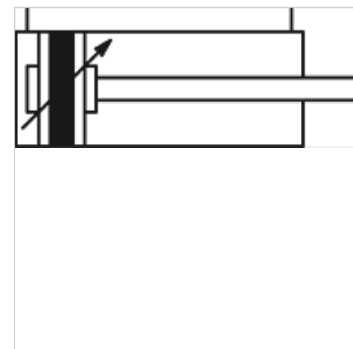

Указание

Прочие данные только по запросу.

Описание

These cylinders are ideal for a wide range of applications owing to their robust design and excellent value for money. The standard type has a double-acting cylinder and features a magnetic piston as well as integrated cushioning. The magnetic switches can be mounted in two T-slots on the same side as the compressed air supply.
Cylinders of the same type can also be supplied on request with fixing parts for magnetic switches on three sides.
The version with a 125 mm bore is provided with fixing accessories on three sides as standard.

Изделие

Наименование	Ø поршня	Ход (mm)	Соединение	Ø поршневого штока (mm)	Внешняя резьба поршневого штока
K- 07 15 15 90	32 mm	25	G 1/8	12	M 10 x 1.25
K- 07 15 15 91	32 mm	50	G 1/8	12	M 10 x 1.25
K- 07 15 15 92	32 mm	80	G 1/8	12	M 10 x 1.25
K- 07 15 15 93	32 mm	100	G 1/8	12	M 10 x 1.25
K- 07 15 15 94	32 mm	125	G 1/8	12	M 10 x 1.25
K- 07 15 15 95	32 mm	160	G 1/8	12	M 10 x 1.25
K- 07 15 15 96	32 mm	200	G 1/8	12	M 10 x 1.25
K- 07 15 15 97	32 mm	250	G 1/8	12	M 10 x 1.25
K- 07 15 15 98	32 mm	320	G 1/8	12	M 10 x 1.25
K- 07 15 15 99	32 mm	400	G 1/8	12	M 10 x 1.25
K- 07 15 16 00	32 mm	500	G 1/8	12	M 10 x 1.25
K- 07 15 16 01	32 mm	600	G 1/8	12	M 10 x 1.25
K- 07 15 16 02	32 mm	800	G 1/8	12	M 10 x 1.25
K- 07 15 16 03	40 mm	25	G 1/4	16	M 12 x 1.25
K- 07 15 16 04	40 mm	50	G 1/4	16	M 12 x 1.25
K- 07 15 16 05	40 mm	80	G 1/4	16	M 12 x 1.25
K- 07 15 16 06	40 mm	100	G 1/4	16	M 12 x 1.25
K- 07 15 16 07	40 mm	125	G 1/4	16	M 12 x 1.25
K- 07 15 16 08	40 mm	160	G 1/4	16	M 12 x 1.25
K- 07 15 16 09	40 mm	200	G 1/4	16	M 12 x 1.25
K- 07 15 16 10	40 mm	250	G 1/4	16	M 12 x 1.25
K- 07 15 16 11	40 mm	320	G 1/4	16	M 12 x 1.25
K- 07 15 16 12	40 mm	400	G 1/4	16	M 12 x 1.25
K- 07 15 16 13	40 mm	500	G 1/4	16	M 12 x 1.25
K- 07 15 16 14	40 mm	600	G 1/4	16	M 12 x 1.25
K- 07 15 16 15	40 mm	800	G 1/4	16	M 12 x 1.25
K- 07 15 16 16	50 mm	25	G 1/4	20	M 16 x 1.5
K- 07 15 16 17	50 mm	50	G 1/4	20	M 16 x 1.5
K- 07 15 16 18	50 mm	80	G 1/4	20	M 16 x 1.5
K- 07 15 16 19	50 mm	100	G 1/4	20	M 16 x 1.5
K- 07 15 16 20	50 mm	125	G 1/4	20	M 16 x 1.5
K- 07 15 16 21	50 mm	160	G 1/4	20	M 16 x 1.5
K- 07 15 16 22	50 mm	200	G 1/4	20	M 16 x 1.5
K- 07 15 16 23	50 mm	250	G 1/4	20	M 16 x 1.5
K- 07 15 16 24	50 mm	320	G 1/4	20	M 16 x 1.5



Несмотря на тщательную проверку мы не можем исключить ошибки, поэтому мы не берем на себя ответственность за содержащуюся информацию.

16.07.2024

HANSA-FLEX AG

www.hansa-flex.com

K-NORMZYLINDER

Standard cylinders

HANSA FLEX

Изделие

Наименование	Ø поршня	Ход (mm)	Соединение	Ø поршневого штока (mm)	Внешняя резьба поршневого штока
K- 07 15 16 25	50 mm	400	G 1/4	20	M 16 x 1.5
K- 07 15 16 26	50 mm	500	G 1/4	20	M 16 x 1.5
K- 07 15 16 27	50 mm	600	G 1/4	20	M 16 x 1.5
K- 07 15 16 28	50 mm	800	G 1/4	20	M 16 x 1.5
K- 07 15 16 29	63 mm	25	G 3/8	20	M 16 x 1.5
K- 07 15 16 30	63 mm	50	G 3/8	20	M 16 x 1.5
K- 07 15 16 31	63 mm	80	G 3/8	20	M 16 x 1.5
K- 07 15 16 32	63 mm	100	G 3/8	20	M 16 x 1.5
K- 07 15 16 33	63 mm	125	G 3/8	20	M 16 x 1.5
K- 07 15 16 34	63 mm	160	G 3/8	20	M 16 x 1.5
K- 07 15 16 35	63 mm	200	G 3/8	20	M 16 x 1.5
K- 07 15 16 36	63 mm	250	G 3/8	20	M 16 x 1.5
K- 07 15 16 37	63 mm	320	G 3/8	20	M 16 x 1.5
K- 07 15 16 38	63 mm	400	G 3/8	20	M 16 x 1.5
K- 07 15 16 39	63 mm	500	G 3/8	20	M 16 x 1.5
K- 07 15 16 40	63 mm	600	G 3/8	20	M 16 x 1.5
K- 07 15 16 41	63 mm	800	G 3/8	20	M 16 x 1.5
K- 07 15 16 42	80 mm	25	G 3/8	25	M 20 x 1.5
K- 07 15 16 43	80 mm	50	G 3/8	25	M 20 x 1.5
K- 07 15 16 44	80 mm	80	G 3/8	25	M 20 x 1.5
K- 07 15 16 45	80 mm	100	G 3/8	25	M 20 x 1.5
K- 07 15 16 46	80 mm	125	G 3/8	25	M 20 x 1.5
K- 07 15 16 47	80 mm	160	G 3/8	25	M 20 x 1.5
K- 07 15 16 48	80 mm	200	G 3/8	25	M 20 x 1.5
K- 07 15 16 49	80 mm	250	G 3/8	25	M 20 x 1.5
K- 07 15 16 50	80 mm	320	G 3/8	25	M 20 x 1.5
K- 07 15 16 51	80 mm	400	G 3/8	25	M 20 x 1.5
K- 07 15 16 52	80 mm	500	G 3/8	25	M 20 x 1.5
K- 07 15 16 53	80 mm	600	G 3/8	25	M 20 x 1.5
K- 07 15 16 54	80 mm	800	G 3/8	25	M 20 x 1.5
K- 07 15 15 64	100 mm	25	G 1/2"	25	M 20 x 1.5
K- 07 15 15 65	100 mm	50	G 1/2"	25	M 20 x 1.5
K- 07 15 15 66	100 mm	80	G 1/2"	25	M 20 x 1.5
K- 07 15 15 67	100 mm	100	G 1/2"	25	M 20 x 1.5
K- 07 15 15 68	100 mm	125	G 1/2"	25	M 20 x 1.5
K- 07 15 15 69	100 mm	160	G 1/2"	25	M 20 x 1.5
K- 07 15 15 70	100 mm	200	G 1/2"	25	M 20 x 1.5
K- 07 15 15 71	100 mm	250	G 1/2"	25	M 20 x 1.5
K- 07 15 15 72	100 mm	320	G 1/2"	25	M 20 x 1.5
K- 07 15 15 73	100 mm	400	G 1/2"	25	M 20 x 1.5
K- 07 15 15 74	100 mm	500	G 1/2"	25	M 20 x 1.5
K- 07 15 15 75	100 mm	600	G 1/2"	25	M 20 x 1.5
K- 07 15 15 76	100 mm	800	G 1/2"	25	M 20 x 1.5
K- 07 15 15 77	125 mm	25	G 1/2"	32	M 27 x 2
K- 07 15 15 78	125 mm	50	G 1/2"	32	M 27 x 2
K- 07 15 15 79	125 mm	80	G 1/2"	32	M 27 x 2
K- 07 15 15 80	125 mm	100	G 1/2"	32	M 27 x 2
K- 07 15 15 81	125 mm	125	G 1/2"	32	M 27 x 2
K- 07 15 15 82	125 mm	160	G 1/2"	32	M 27 x 2
K- 07 15 15 83	125 mm	200	G 1/2"	32	M 27 x 2
K- 07 15 15 84	125 mm	250	G 1/2"	32	M 27 x 2
K- 07 15 15 85	125 mm	320	G 1/2"	32	M 27 x 2
K- 07 15 15 86	125 mm	400	G 1/2"	32	M 27 x 2
K- 07 15 15 87	125 mm	500	G 1/2"	32	M 27 x 2
K- 07 15 15 88	125 mm	600	G 1/2"	32	M 27 x 2
K- 07 15 15 89	125 mm	800	G 1/2"	32	M 27 x 2

Принадлежности

K-FUSSBEFESTIGUNG 3	Foot model
K-SCHWENKGABELBEFESTIG	Female hinge model
K-SCHWENKAUGENBEFEST 1	Male hinge model
K-SPHAERISCHE SCHWENKAUGENB	Articulated male hinge model
K-GEGENLAGER 1	Counter-hinge model



Несмотря на тщательную проверку мы не можем исключить ошибки, поэтому мы не берем на себя ответственность за содержащуюся информацию.

16.07.2024

HANSA-FLEX AG

www.hansa-flex.com

