



# K-WTST SAFETY BK SCHA AN DR HANSA

SAFETY service unit sets, comprising a ball valve with silencer, start-up valve and pressure regulator

**HANSA FLEX**

## Свойства

|                                    |   |
|------------------------------------|---|
| Входное давление                   | 2.5 - 16 bar  |
| Выходное давление                  | 0.5 - 8 bar   |
| Область температур                 | -10 °C to +50 °C  |
| Рабочие среды                      | Сжатый воздух   |
| Набивочный материал                | Нитрильный каучук   |
| Соединительная резьба              | Material: Die-cast zinc   |
| Емкость                            | Polycarbonate (with bayonet lock) and bowl guard                  |
| Фильтрующий элемент                | Cellpor (PE) 5 µm   |
| Корпус                             | Material: Grivory® (PA 66)  |
| Мембрана                           | NBR   |
| Расход собственного воздуха        | Max. 1.5 l/min (depending on secondary pressure)                  |
| Измерение расхода воздуха          | At P1 = 10 bar, P2 = 6.3 bar and pressure drop $\Delta p = 1$ bar |
| Соединение вентиляции Шаровой кран | Silencer  |

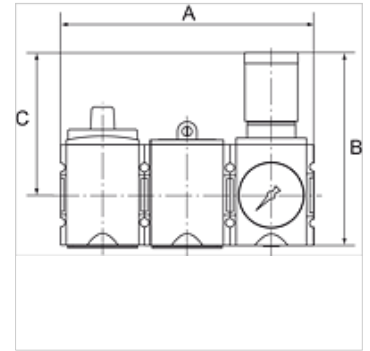

## Указание

Прочие данные только по запросу.

## Описание

These compressed air service unit sets, comprising a ball valve with silencer, a start-up valve and one out of a pressure regulator, filter regulator or service unit, meet even the strictest requirements for operating reliability and accident prevention!

## Указания по заказу

The price does not include a key lock and padlock. Please order separately. For accessories and spare parts, refer to individual components: ball valve, start-up valve, pressure regulator, filter regulator, 2-piece service unit

## Изделие

| Наименование   | Резьба | Диапазон регулирования | Расход (L/min) | A (mm) | B        | C (mm) |
|----------------|--------|------------------------|----------------|--------|----------|--------|
| K- 07 25 15 20 | G 1/4  | 2.5 - 8 bar            | 2000           | 156,0  | 128,5 mm | 95,5   |
| K- 07 25 15 21 | G 3/8  | 2.5 - 8 bar            | 2000           | 156,0  | 128,5 mm | 95,5   |
| K- 07 25 15 22 | G 3/8  | 2.5 - 8 bar            | 4300           | 189,0  | 149,5 mm | 110,0  |
| K- 07 25 15 23 | G 1/2  | 2.5 - 8 bar            | 4300           | 189,0  | 149,5 mm | 110,0  |
| K- 07 25 15 24 | G 3/4  | 2.5 - 8 bar            | 10000          | 255,0  | 191,0 mm | 137,0  |
| K- 07 25 15 25 | G 1    | 2.5 - 8 bar            | 10000          | 255,0  | 191,0 mm | 137,0  |

## Принадлежности

|                    |          |
|--------------------|----------|
| K-STECKSCHLOSS     | Key lock |
| K-VORHAENGESCHLOSS | Padlock  |