

K-X-STECKVERBINDUNG 1

X-unions

HANSA FLEX

Свойства


Рабочее давление Max. 16 bar

Рабочая температура -20 °C to +80 °C

Материал Никелированная латунь

Прижимное кольцо Hostaform

Зажимное кольцо Stainless steel

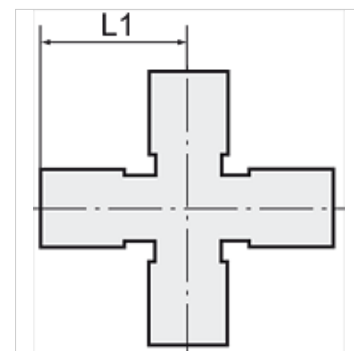

Указание

Прочие данные только по запросу.

Описание

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

Изделие

| Наименование | для наружного Ø шланга | L1 (mm) |
|----------------|------------------------|------------|
| K- 07 40 47 29 | 4 mm | 18,6 |
| K- 07 40 47 30 | 6 mm | 21,9 |
| K- 07 40 47 31 | 8 mm | 25,4 |