


K-T AG-K ISO 7-1 2 VA

Male branch tees, conical male thread acc. to ISO 7-1, stainless steel

HANSA FLEX

Свойства

Диапазон давлений	Max. 25 bar
рекомендуемые шланги	PTFE hose
Область температур	-40 °C to +200 °C (depending on the hose quality and diameter)
Материал	нержавеющая сталь 1.4404
Уплотнение	Pure metal

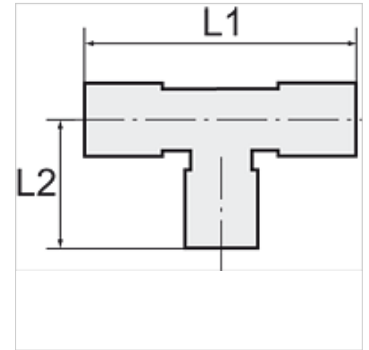

Указание

Прочие данные только по запросу.

Описание

Supplied without seals. For use with corrosive media and at high temperatures. Screw fitting series made of stainless steel for all applications where compliance with strict tightness, pressure and temperature requirements is essential. The parts are manufactured without rubber seals, in other words they are ideal for very high temperatures or for use with corrosive liquids, e.g. in cases when FPM is no longer suitable.

Изделие

Наименование	Резьба	Для шланга	L1 (mm)	L2 (mm)	SW1 (mm)	SW2 (mm)
K- 07 40 30 43	R 1/8	6 mm / 4 mm	46,0	17,0	12	10
K- 07 40 30 44	R 1/8	8 mm / 6 mm	46,0	17,0	14	10
K- 07 40 30 41	R 1/4	6 mm / 4 mm	46,0	21,5	12	10
K- 07 40 30 42	R 1/4	8 mm / 6 mm	46,0	21,5	14	10
K- 07 40 30 40	R 1/4	10 mm / 8 mm	52,0	21,5	16	12