


K-WV 5/2 BEIDS ELEKTRO

5/2-way spool valves, double solenoid

HANSA FLEX

Свойства

| | |
|---------------------------|---|
| Функция | 5/2-way |
| Рабочее давление | 2.5 - 10 bar; Max. vacuum 10 bar (external pilot air) |
| мин. рабочее давление | 2,5 bar |
| Область температур | -10 °C to +60 °C |
| Расход 6 бар и 10 бар | 1500 NI/min (G 1/4), 4600 NI/min (G 1/2) |
| Подключение к электросети | Coupler plug PG 9 - form B |
| Степень защиты | IP 65 (DIN 46244) |
| Корпус | Anodised aluminium, blue |
| Игольчатый затвор | Stainless steel |
| Набивочный материал | Нитрильный каучук |

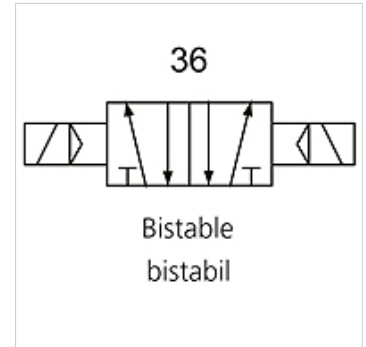

Указание

Прочие данные только по запросу.

Описание

This valve design, featuring the Tapered Tee Seal®, offers the ability to run without lubrication and supports almost any compressed air quality. The valves are largely resistant to dirt and can thus also be used under extreme conditions without any problems. Leakage is now a thing of the past and the spool no longer sticks, even after long idle periods.

Изделие

| Наименование | Соединение | Напряжение | DN | Номер схемы соединений | Управление |
|----------------|------------|-----------------|----|------------------------|------------|
| K- 07 15 02 25 | G 1/4 | 24 V DC | 8 | 36 | |
| K- 07 15 02 26 | G 1/2" | 24 V DC | 15 | 36 | |
| K- 07 15 02 27 | G 1/4 | 230 V AC, 50 Hz | 8 | 36 | |
| K- 07 15 02 28 | G 1/2" | 230 V AC, 50 Hz | 15 | 36 | |