
K-RD STUECKE PP

Reducers

Свойства

Рабочее давление	on request
Рабочая температура	Max. +20 °C
Материал	Polypropylene (PP)
Набивочный материал	Нитрильный каучук



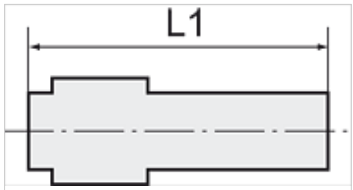

Указание

Прочие данные только по запросу.

Описание

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Изделие

Наименование	для наружного Ø шланга	L1 (mm)	Штуцеры (mm)
K- 07 40 29 00	22 mm	127,0	32
K- 07 40 29 01	28 mm	133,3	32

Несмотря на тщательную проверку мы не может исключить ошибки, поэтому мы не берем на себя ответственность за содержащуюся информацию.