


# K-VSTO PP

## Plugs

### Свойства

Рабочее давление	on request
Рабочая температура	Max. +20 °C
Материал	Polypropylene (PP)
Набивочный материал	Нитрильный каучук

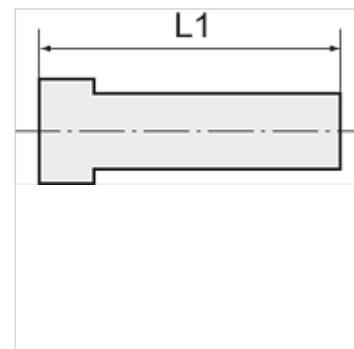

### Указание

Прочие данные только по запросу.

### Описание

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

### Изделие

Наименование	L1 (mm)	Штуцеры (mm)
K- 07 40 29 21	102,0	32