
# K-VSTO PP
Plugs

## Свойства

| | |
|---|---|
| **Рабочее давление** | on request |
| **Рабочая температура** | Max. +20 °C |
| **Материал** | Polypropylene (PP) |
| **Набивочный материал** | Нитрильный каучук |



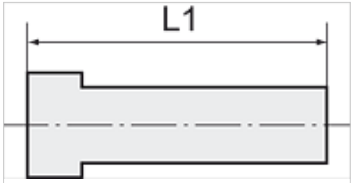


## Указание

Прочие данные только по запросу.

## Описание

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

## Изделие

| Наименование | L1 (mm) | Штуцеры (mm) |
|---|---|---|
| **K- 07 40 29 21** | 102,0 | 32 |

*Несмотря на тщательную проверку мы не может исключить ошибки, поэтому мы не берем на себя ответственность за содержащуюся информацию.*