

# K-STECKVERBINDU 1

Straight push-in connector

**HANSA FLEX**

## Свойства



Рабочее давление Max. 16 bar

Рабочая температура -20 °C to +80 °C

Материал Никелированная латунь

Прижимное кольцо Hostaform

Зажимное кольцо Stainless steel

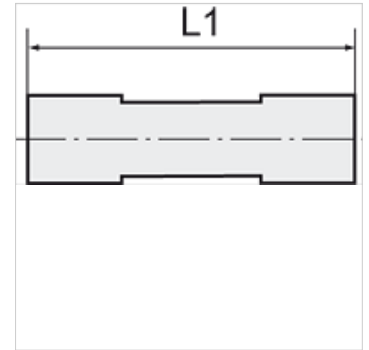

## Указание

Прочие данные только по запросу.

## Описание

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

## Изделие

| Наименование   | Резьба     | для наружного Ø шланга | L1<br>(mm) |
|----------------|------------|------------------------|------------|
| K- 07 40 25 18 | M 8 x 0.75 | 3 mm                   | 18,4       |
| K- 07 40 25 19 | M 11 x 1   | 4 mm                   | 30,6       |
| K- 07 40 25 20 | M 14 x 1   | 5 mm                   | 33,5       |
| K- 07 40 25 21 | M 13 x 1   | 6 mm                   | 33,0       |
| K- 07 40 25 22 | M 15 x 1   | 8 mm                   | 35,7       |
| K- 07 40 25 23 | M 17 x 1   | 10 mm                  | 39,2       |
| K- 07 40 25 24 | M 20 x 1   | 12 mm                  | 39,7       |
| K- 07 40 25 25 | M 24 x 1   | 14 mm                  | 45,9       |